


MCU-BS

Cam upper plate, bronze- self lubricating

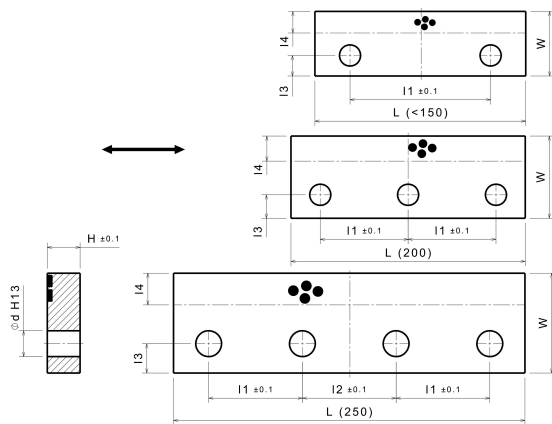

Product discription:

Cam upper plate, bronze- self lubricating

Article properties:

Sliding speed v	30 m/min
Base Material	Special Brass (SO#50SP2)
Self-lubricating	Yes
Lubricant	Graphite
Surface Pressure P	100 N/mm ²
P*v-value	200 N/mm ² x m/min
Operating temperature	-50°C / +200°C (max. 300°C)
Friction coefficient	0,07

Variants:

Articlenumber	Article name	Width W	Length L	Height H	I1	I2	I3	I4	d (DIN EN 20273)	Version
21320756	MCU-BS 25-75-10	25	75	10	45	-	8	7,5	2xM8	A
21321006	MCU-BS 25-100-10	25	100	10	50	-	8	7,5	2xM8	A
21321256	MCU-BS 25-125-10	25	125	10	75	-	8	7,5	2xM8	A
21320750	MCU-BS 33-75-10	33	75	10	45	-	12,5	9	2xM10	A
21321000	MCU-BS 33-100-10	33	100	10	50	-	12,5	9	2xM10	A
21321250	MCU-BS 33-125-10	33	125	10	75	-	12,5	9	2xM10	A
21321500	MCU-BS 33-150-10	33	150	10	100	-	12,5	9	2xM10	A
21322000	MCU-BS 33-200-10	33	200	10	75	-	12,5	9	3xM10	B
21321001	MCU-BS 52-100-20	52	100	20	50	-	20	13	2xM12	A
21321501	MCU-BS 52-150-20	52	150	20	50	-	20	13	3xM12	B
21322001	MCU-BS 52-200-20	52	200	20	75	-	20	13	3xM12	B
21322501	MCU-BS 52-250-20	52	250	20	75	50	20	13	4xM12	C
21321002	MCU-BS 72-100-30	72	100	30	50	-	25	22	2xM16	A
21321502	MCU-BS 72-150-30	72	150	30	50	-	25	22	3xM16	B
21322002	MCU-BS 72-200-30	72	200	30	75	-	25	22	3xM16	B
21322502	MCU-BS 72-250-30	72	250	30	75	50	25	22	4xM16	C
21321503	MCU-BS 77-150-35	77	150	35	50	-	25	27	3xM16	B
21322003	MCU-BS 77-200-35	77	200	35	75	-	25	27	3xM16	B
21322503	MCU-BS 77-250-35	77	250	35	75	50	25	27	4xM16	C
21321504	MCU-BS 82-150-40	82	150	40	50	-	25	32	3xM16	B
21322004	MCU-BS 82-200-40	82	200	40	75	-	25	32	3xM16	B

MCU-BS

Cam upper plate, bronze- self lubricating



Articlenumber	Article name	Width W	Length L	Height H	I1	I2	I3	I4	d (DIN EN 20273)	Version
21322504	MCU-BS 82-250-40	82	250	40	75	50	25	32	4xM16	C
21321505	MCU-BS 105-150-40	105	150	40	50	-	25	32	3xM16	B
21322005	MCU-BS 105-200-40	105	200	40	50	50	25	32	4xM16	C
21322505	MCU-BS 105-250-40	105	250	40	75	50	25	32	4xM16	C