



SUWB

Large format CAM-Unit for hole punching and bending operations

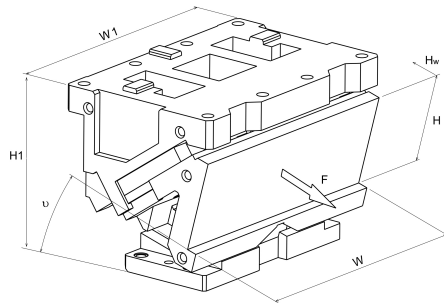

Product discription:

Large format CAM-Unit for hole punching and bending operations

Working force designed for 1 million strokes

Permissible working force for 300.000 strokes can be found in the [PDF](#)

Article properties:

CAM-Type	Aerial CAM
----------	------------

Variants:

Articlenumber	Article name	Cam Width W1	Shutheight H1	Work Area Width W	Work Area Height H	Stroke Hw	Working Angle u (°)	Returnforce Coil spring Fr (kN)	Returnforce Gas pressure spring Fr (kN)	Working Force F (kN)*	Weight (kg)
SUWB200-00	SUWB200-00	200	350	200	180	38,6	0	6,8	9,1	117,6	95
SUWB200-05	SUWB200-05	200	350	200	180	42,6	5	6,7	9,1	117,6	94,8
SUWB200-10	SUWB200-10	200	350	200	180	46,7	10	6,7	9,1	117,6	94,6
SUWB200-15	SUWB200-15	200	350	200	180	50,9	15	6,7	9	117,6	93,3
SUWB200-20	SUWB200-20	200	350	200	180	55,3	20	6,6	9	117,6	92,7
SUWB200-25	SUWB200-25	200	350	200	180	60	25	6,6	9	117,6	94,1
SUWB200-30	SUWB200-30	200	350	200	180	65,1	30	6,6	8,9	117,6	92,7
SUWB200-35	SUWB200-35	200	350	200	180	70,8	35	6,5	8,9	117,6	94,8
SUWB200-40	SUWB200-40	200	350	200	180	77,1	40	6,5	8,8	117,6	94,2
SUWB200-45	SUWB200-45	200	350	200	180	84,5	45	6,4	8,8	117,6	96,3
SUWB200-50	SUWB200-50	200	350	200	180	93,3	50	6,4	8,8	117,6	93,7
SUWB200-55	SUWB200-55	200	350	200	180	104,6	55	7	9,5	117,6	98,2
SUWB200-60	SUWB200-60	200	350	200	180	120	60	7,7	10,5	117,6	97,3
SUWB300-00	SUWB300-00	300	350	300	180	38,6	0	13,4	18,2	196	137,2
SUWB300-05	SUWB300-05	300	350	300	180	42,6	5	13,4	18,1	196	135,9
SUWB300-10	SUWB300-10	300	350	300	180	46,7	10	13,3	18,1	196	135,7
SUWB300-15	SUWB300-15	300	350	300	180	50,9	15	13,3	18	196	133
SUWB300-20	SUWB300-20	300	350	300	180	55,3	20	13,2	17,9	196	131,5
SUWB300-25	SUWB300-25	300	350	300	180	60	25	13,1	17,9	196	131
SUWB300-30	SUWB300-30	300	350	300	180	65,1	30	13,1	17,8	196	131
SUWB300-35	SUWB300-35	300	350	300	180	70,8	35	13	17,7	196	131,8
SUWB300-40	SUWB300-40	300	350	300	180	77,1	40	12,9	17,7	196	133,3

SUWB

Large format CAM-Unit for hole punching and bending operations



Articlenumber	Article name	Cam Width W1	Shutheight H1	Work Area Width W	Work Area Height H	Stroke Hw	Working Angle u (°)	Returnforce Coil spring Fr (kN)	Returnforce Gas pressure spring Fr (kN)	Working Force F (kN)*	Weight (kg)
SUWB300-45	SUWB300-45	300	350	300	180	84,5	45	12,9	17,6	196	134,8
SUWB300-50	SUWB300-50	300	350	300	180	93,3	50	12,8	17,5	196	130,9
SUWB300-55	SUWB300-55	300	350	300	180	104,6	55	13,9	19,1	196	133
SUWB300-60	SUWB300-60	300	350	300	180	120	60	15,4	21,1	196	136,1
SUWB400-00	SUWB400-00	400	350	400	180	38,6	0	13,6	18,3	245	191,1
SUWB400-05	SUWB400-05	400	350	400	180	42,6	5	13,5	18,3	245	189,3
SUWB400-10	SUWB400-10	400	350	400	180	46,7	10	13,5	18,2	245	188
SUWB400-15	SUWB400-15	400	350	400	180	50,9	15	13,4	18,1	245	186,1
SUWB400-20	SUWB400-20	400	350	400	180	55,3	20	13,3	18	245	185,3
SUWB400-25	SUWB400-25	400	350	400	180	60	25	13,2	17,9	245	188,1
SUWB400-30	SUWB400-30	400	350	400	180	65,1	30	13,1	17,9	245	185,8
SUWB400-35	SUWB400-35	400	350	400	180	70,8	35	13	17,8	245	192,4
SUWB400-40	SUWB400-40	400	350	400	180	77,1	40	13	17,7	245	191,9
SUWB400-45	SUWB400-45	400	350	400	180	84,5	45	12,9	17,6	245	195,9
SUWB400-50	SUWB400-50	400	350	400	180	93,3	50	12,8	17,5	245	191,8
SUWB400-55	SUWB400-55	400	350	400	180	104,6	55	13,9	19	245	198,5
SUWB400-60	SUWB400-60	400	350	400	180	120	60	15,4	21	245	201,1
SUWB500-00	SUWB500-00	500	350	500	180	38,6	0	20,2	27,3	313,6	222,3
SUWB500-05	SUWB500-05	500	350	500	180	42,6	5	20,2	27,3	313,6	220,4
SUWB500-10	SUWB500-10	500	350	500	180	46,7	10	20,1	27,2	313,6	218,8
SUWB500-15	SUWB500-15	500	350	500	180	50,9	15	20	27,1	313,6	216,3
SUWB500-20	SUWB500-20	500	350	500	180	55,3	20	19,9	27	313,6	215,1
SUWB500-25	SUWB500-25	500	350	500	180	60	25	19,8	26,9	313,6	217,1
SUWB500-30	SUWB500-30	500	350	500	180	65,1	30	19,6	26,7	313,6	216,1
SUWB500-35	SUWB500-35	500	350	500	180	70,8	35	19,5	26,6	313,6	222,1
SUWB500-40	SUWB500-40	500	350	500	180	77,1	40	19,4	26,5	313,6	220,4
SUWB500-45	SUWB500-45	500	350	500	180	84,5	45	19,3	26,4	313,6	223
SUWB500-50	SUWB500-50	500	350	500	180	93,3	50	19,2	26,3	313,6	220,1
SUWB500-55	SUWB500-55	500	350	500	180	104,6	55	20,9	28,6	313,6	227,2
SUWB500-60	SUWB500-60	500	350	500	180	120	60	23,1	31,6	313,6	236,5
SUWB600-00	SUWB600-00	600	350	600	180	38,6	0	27	36,4	392	281,4
SUWB600-05	SUWB600-05	600	350	600	180	42,6	5	26,8	36,3	392	277,9
SUWB600-10	SUWB600-10	600	350	600	180	46,7	10	26,7	36,2	392	274,1
SUWB600-15	SUWB600-15	600	350	600	180	50,9	15	26,6	36,1	392	272,3
SUWB600-20	SUWB600-20	600	350	600	180	55,3	20	26,5	35,9	392	268,8
SUWB600-25	SUWB600-25	600	350	600	180	60	25	26,3	35,8	392	268,3
SUWB600-30	SUWB600-30	600	350	600	180	65,1	30	26,2	35,6	392	276,6
SUWB600-35	SUWB600-35	600	350	600	180	70,8	35	26	35,5	392	276
SUWB600-40	SUWB600-40	600	350	600	180	77,1	40	25,9	35,4	392	285,2
SUWB600-45	SUWB600-45	600	350	600	180	84,5	45	25,7	35,2	392	284,4
SUWB600-50	SUWB600-50	600	350	600	180	93,3	50	25,6	35,1	392	283,5
SUWB600-55	SUWB600-55	600	350	600	180	104,6	55	27,8	38,1	392	292
SUWB600-60	SUWB600-60	600	350	600	180	120	60	30,8	42,2	392	295,6