



UCMSNR

Aerial CAM-Unit according to NAAMS standard, for hole punching and bending operations

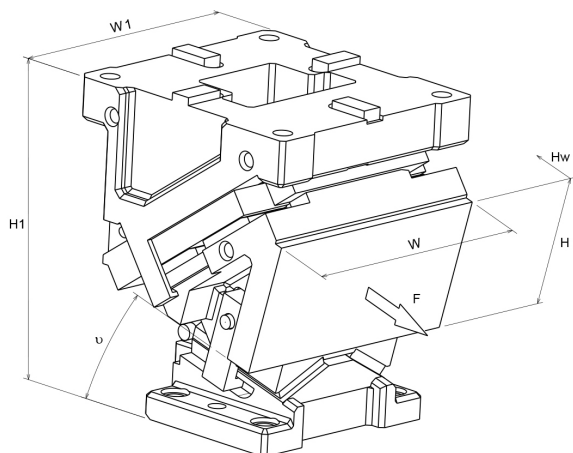

Product description:

Aerial CAM-Unit according to NAAMS standard, for hole punching and bending operations
Working force designed for 1 million strokes

Article properties:

CAM-Type	Aerial CAM
----------	------------

For more information, please read the [PDF](#)

Variants:

Articlenumber	Article name	Cam Width W1	Shutheight H1	Work Area Width W	Work Area Height H	Stroke Hw	Working Angle u (°)	Returnforce Fr (kN)	Working Force F (kN)*	Weight (kg)
UCMSNR7-217049	UCMSNR70-00	70	225	70	75	19,3	0	3,2	98,1	16,1
UCMSNR7-217050	UCMSNR70-05	70	225	70	75	21,3	5	3,1	98,1	15,4
UCMSNR7-217051	UCMSNR70-10	70	225	70	75	23,3	10	3,1	98,1	14,8
UCMSNR7-217052	UCMSNR70-15	70	225	70	75	25,4	15	3,1	98,1	14,1
UCMSNR7-217053	UCMSNR70-20	70	225	70	75	27,6	20	3,1	98,1	14,1
UCMSNR7-217054	UCMSNR70-25	70	225	70	75	30	25	3,1	98,1	14
UCMSNR7-217055	UCMSNR70-30	70	225	70	75	32,6	30	3,1	98,1	13,8
UCMSNR7-217056	UCMSNR70-35	70	225	70	75	35,4	35	3,1	98,1	13,7
UCMSNR7-217057	UCMSNR70-40	70	225	70	75	38,6	40	3,1	98,1	13,8
UCMSNR7-217058	UCMSNR70-45	70	225	70	75	42,3	45	3,1	98,1	13,8
UCMSNR7-217059	UCMSNR70-50	70	225	70	75	46,7	50	3,1	98,1	13,9
UCMSNR7-217060	UCMSNR70-55	70	225	70	75	43,6	55	3,4	98,1	14,1
UCMSNR7-217061	UCMSNR70-60	70	225	70	75	50	60	3,7	98,1	14,5
UCMSNR8-217062	UCMSNR80-00	80	275	80	75	32,1	0	3,2	166,7	27,9
UCMSNR8-217063	UCMSNR80-05	80	275	80	75	35,5	5	3,2	166,7	27,5
UCMSNR8-217064	UCMSNR80-10	80	275	80	75	38,9	10	3,2	166,7	26,9
UCMSNR8-217065	UCMSNR80-15	80	275	80	75	42,4	15	3,2	166,7	26,5
UCMSNR8-217066	UCMSNR80-20	80	275	80	75	46,1	20	3,1	166,7	26
UCMSNR8-217067	UCMSNR80-25	80	275	80	75	50	25	3,1	166,7	25,9
UCMSNR8-217068	UCMSNR80-30	80	275	80	75	54,3	30	3,1	166,7	25,3
UCMSNR8-217069	UCMSNR80-35	80	275	80	75	59	35	3,1	166,7	25
UCMSNR8-217070	UCMSNR80-40	80	275	80	75	64,3	40	3,1	166,7	24,7
UCMSNR8-217071	UCMSNR80-45	80	275	80	75	70,4	45	3,1	166,7	24,7
UCMSNR8-217072	UCMSNR80-50	80	275	80	75	77,8	50	3,1	166,7	24,9

UCMSNR

Aerial CAM-Unit according to NAAMS standard, for hole punching and bending operations



Articlenumber	Article name	Cam Width W1	Shutheight H1	Work Area Width W	Work Area Height H	Stroke Hw	Working Angle u (°)	Returnforce Fr (kN)	Working Force F (kN)*	Weight (kg)
UCMSNR8-217073	UCMSNR80-55	80	275	80	75	78,5	55	3,4	166,7	25,8
UCMSNR8-217074	UCMSNR80-60	80	275	80	75	80	60	3,7	166,7	26,2
UCMSNR1-217075	UCMSNR165-00	165	300	165	120	32,1	0	4,7	294,2	76,1
UCMSNR1-217076	UCMSNR165-05	165	300	165	120	35,5	5	4,7	294,2	74,2
UCMSNR1-217077	UCMSNR165-10	165	300	165	120	38,9	10	4,7	294,2	73,8
UCMSNR1-217078	UCMSNR165-15	165	300	165	120	42,4	15	4,7	294,2	73,1
UCMSNR1-217079	UCMSNR165-20	165	300	165	120	46,1	20	4,6	294,2	72,3
UCMSNR1-217080	UCMSNR165-25	165	300	165	120	50	25	4,6	294,2	72,1
UCMSNR1-217081	UCMSNR165-30	165	300	165	120	54,3	30	4,6	294,2	71,9
UCMSNR1-217082	UCMSNR165-35	165	300	165	120	59	35	4,6	294,2	72,2
UCMSNR1-217083	UCMSNR165-40	165	300	165	120	64,3	40	4,5	294,2	72,4
UCMSNR1-217084	UCMSNR165-45	165	300	165	120	70,4	45	4,5	294,2	65,5
UCMSNR1-217085	UCMSNR165-50	165	300	165	120	77,8	50	4,5	294,2	64,3
UCMSNR1-217086	UCMSNR165-55	165	300	165	125	87,2	55	4,9	294,2	65,2
UCMSNR1-217087	UCMSNR165-60	165	300	165	125	100	60	5,4	294,2	66,6
UCMSNR2-217088	UCMSNR200-00	200	300	200	120	32,1	0	8,4	353	90,3
UCMSNR2-217089	UCMSNR200-05	200	300	200	120	35,5	5	8,3	353	88
UCMSNR2-217090	UCMSNR200-10	200	300	200	120	38,9	10	8,3	353	87,5
UCMSNR2-217091	UCMSNR200-15	200	300	200	120	42,4	15	8,3	353	87
UCMSNR2-217092	UCMSNR200-20	200	300	200	120	46,1	20	8,2	353	85,8
UCMSNR2-217093	UCMSNR200-25	200	300	200	120	50	25	8,2	353	86,2
UCMSNR2-217094	UCMSNR200-30	200	300	200	120	54,3	30	8,2	353	85,6
UCMSNR2-217095	UCMSNR200-35	200	300	200	120	59	35	8,1	353	86,2
UCMSNR2-217096	UCMSNR200-40	200	300	200	120	64,3	40	8,1	353	86,6
UCMSNR2-217097	UCMSNR200-45	200	300	200	120	70,4	45	8,1	353	88
UCMSNR2-217098	UCMSNR200-50	200	300	200	120	77,8	50	8	353	78,2
UCMSNR2-217099	UCMSNR200-55	200	300	200	120	87,2	55	8,7	353	80,5
UCMSNR2-217100	UCMSNR200-60	200	300	200	120	100	60	9,6	353	82,4
UCMSNR3-217101	UCMSNR300-00	300	375	300	160	38,6	0	14,5	451,1	153,2
UCMSNR3-217102	UCMSNR300-05	300	375	300	160	42,6	5	14,5	451,1	152,5
UCMSNR3-217103	UCMSNR300-10	300	375	300	160	46,7	10	14,4	451,1	151,4
UCMSNR3-217104	UCMSNR300-15	300	375	300	160	50,9	15	14,4	451,1	154,1
UCMSNR3-217105	UCMSNR300-20	300	375	300	160	55,3	20	14,3	451,1	148,2
UCMSNR3-217106	UCMSNR300-25	300	375	300	160	60	25	14,3	451,1	150,2
UCMSNR3-217107	UCMSNR300-30	300	375	300	160	65,1	30	14,2	451,1	147,3
UCMSNR3-217108	UCMSNR300-35	300	375	300	160	70,8	35	14,2	451,1	148
UCMSNR3-217109	UCMSNR300-40	300	375	300	160	77,1	40	14,1	451,1	146,2
UCMSNR3-217110	UCMSNR300-45	300	375	300	160	84,5	45	14	451,1	148,6
UCMSNR3-217111	UCMSNR300-50	300	375	300	160	79,3	50	14	451,1	122,5
UCMSNR3-217112	UCMSNR300-55	300	375	300	160	88,9	55	15,2	451,1	130,9
UCMSNR3-217113	UCMSNR300-60	300	375	300	160	102	60	16,8	451,1	135,3
UCMSNR4-217114	UCMSNR400-00	300	375	400	160	38,6	0	14,5	451,1	160,2
UCMSNR4-217115	UCMSNR400-05	300	375	400	160	42,6	5	14,5	451,1	159,5
UCMSNR4-217116	UCMSNR400-10	300	375	400	160	46,7	10	14,4	451,1	158,4
UCMSNR4-217117	UCMSNR400-15	300	375	400	160	50,9	15	14,4	451,1	161,1
UCMSNR4-217118	UCMSNR400-20	300	375	400	160	55,3	20	14,3	451,1	155,2

UCMSNR

Aerial CAM-Unit according to NAAMS standard, for hole punching and bending operations



Articlenumber	Article name	Cam Width W1	Shutheight H1	Work Area Width W	Work Area Height H	Stroke Hw	Working Angle u (°)	Returnforce Fr (kN)	Working Force F (kN)*	Weight (kg)
UCMSNR4-217119	UCMSNR400-25	300	375	400	160	60	25	14,3	451,1	157,3
UCMSNR4-217120	UCMSNR400-30	300	375	400	160	65,1	30	14,2	451,1	154,3
UCMSNR4-217121	UCMSNR400-35	300	375	400	160	70,8	35	14,2	451,1	155
UCMSNR4-217122	UCMSNR400-40	300	375	400	160	77,1	40	14,1	451,1	153,2
UCMSNR4-217123	UCMSNR400-45	300	375	400	160	84,5	45	14	451,1	155,6
UCMSNR4-217124	UCMSNR400-50	300	375	400	160	79,3	50	14	451,1	127,7
UCMSNR4-217125	UCMSNR400-55	300	375	400	160	88,9	55	15,2	451,1	135,9
UCMSNR4-217126	UCMSNR400-60	300	375	400	160	102	60	16,8	451,1	140,4