



VALCAM™ 100

Aerial CAM-Unit "ALL IN ONE", available in 4 working forces

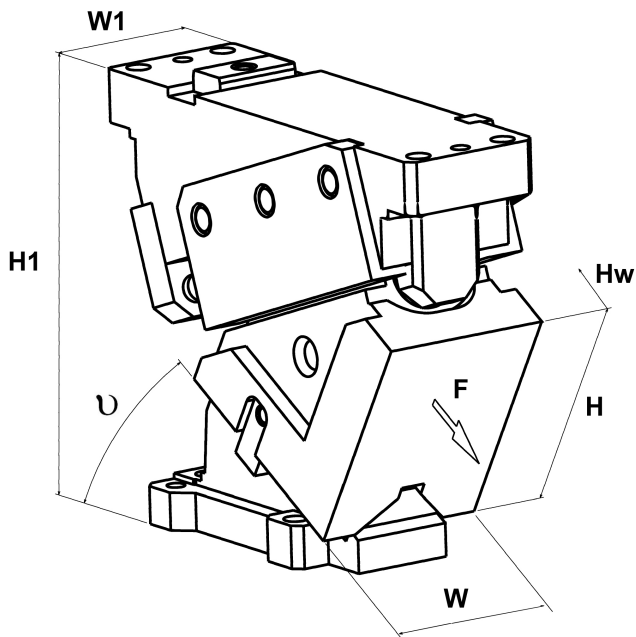

Product discription:

Aerial CAM-Unit "ALL IN ONE", available in 2 working forces
Working force designed for 1 million strokes

For more information, see the working force distribution
diagram in the [PDF](#)

Article properties:

CAM-Type	Aerial CAM
----------	------------

Variants:

Articlenumber	Article name	Cam Width W1	Shutheight H1	Work Area Width W	Work Area Height H	Stroke Hw	Working Angle u (°)	Returnforce Coil spring Fr (kN)	Returnforce Gas pressure spring Fr (kN)	Working Force F (kN)*	Weight (kg)
VACYL100-00	VACYL100-00	100	245	100	108	35,4	0	3,8	9,1	86,7	29,1
VACPL100-00	VACPL100-00	100	245	100	108	35,4	0	7,6	9,1	116,1	29,1
VACYL100-05	VACYL100-05	100	245	100	108	39	5	3,8	9,1	86,7	29
VACPL100-05	VACPL100-05	100	245	100	108	39	5	7,6	9,1	116,1	29
VACYL100-10	VACYL100-10	100	245	100	108	42,8	10	3,8	9,1	86,7	28,7
VACPL100-10	VACPL100-10	100	245	100	108	42,8	10	7,6	9,1	116,1	28,7
VACYL100-15	VACYL100-15	100	245	100	108	46,6	15	3,8	9,1	86,7	28,5
VACPL100-15	VACPL100-15	100	245	100	108	46,6	15	7,6	9,1	116,1	28,5
VACYL100-20	VACYL100-20	100	245	100	108	50,7	20	3,8	9,1	86,7	28,5
VACPL100-20	VACPL100-20	100	245	100	108	50,7	20	7,6	9,1	116,1	28,5
VACYL100-25	VACYL100-25	100	245	100	108	55	25	3,8	9,1	86,7	28,4
VACPL100-25	VACPL100-25	100	245	100	108	55	25	7,6	9,1	116,1	28,4
VACYL100-30	VACYL100-30	100	245	100	108	59,7	30	3,8	9,1	86,7	28,2
VACPL100-30	VACPL100-30	100	245	100	108	59,7	30	7,6	9,1	116,1	28,2
VACYL100-35	VACYL100-35	100	245	100	108	64,9	35	3,7	9	86,7	28,2
VACPL100-35	VACPL100-35	100	245	100	108	64,9	35	7,5	9	116,1	28,2
VACYL100-40	VACYL100-40	100	245	100	108	70,7	40	3,7	9	86,7	28,1
VACPL100-40	VACPL100-40	100	245	100	108	70,7	40	7,5	9	116,1	28,1

VALCAM™ 100

Aerial CAM-Unit "ALL IN ONE", available in 4 working forces



Articlenumber	Article name	Cam Width W1	Shutheight H1	Work Area Width W	Work Area Height H	Stroke Hw	Working Angle u (°)	Returnforce Coil spring Fr (kN)	Returnforce Gas pressure spring Fr (kN)	Working Force F (kN)*	Weight (kg)
VACYL100-45	VACYL100-45	100	245	100	108	77,5	45	3,7	9	86,7	28,2
VACPL100-45	VACPL100-45	100	245	100	108	77,5	45	7,5	9	116,1	28,2
VACYL100-50	VACYL100-50	100	250	100	108	85,6	50	3,7	9	86,7	28,9
VACPL100-50	VACPL100-50	100	250	100	108	85,6	50	7,5	9	116,1	28,9
VACYL100-55	VACYL100-55	100	260	100	110	81,9	55	3,9	10	86,7	30,1
VACPL100-55	VACPL100-55	100	260	100	110	81,9	55	8	10	116,1	30,1
VACYL100-60	VACYL100-60	100	270	100	110	82	60	4,3	10,6	86,7	31
VACPL100-60	VACPL100-60	100	270	100	110	82	60	8,8	10,6	116,1	31
VACYL100-65	VACYL100-65	100	270	100	115	82,8	65	4,8	12,4	86,7	31,4
VACPL100-65	VACPL100-65	100	270	100	115	82,8	65	9,6	12,4	116,1	31,4
VACYL100-70	VACYL100-70	100	270	100	120	81,9	70	5,5	14	86,7	32,1
VACPL100-70	VACPL100-70	100	270	100	120	81,9	70	10,6	14	116,1	32,1