
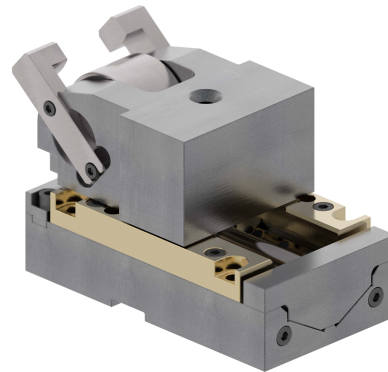


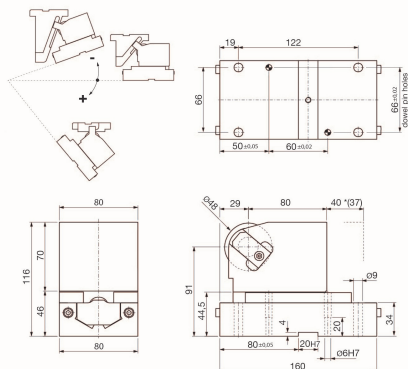

Product discription:

Roller cam

Article properties:

CAM-Type

Die-mounted CAM

For more information, please read the [PDF](#)

Variants:

Articlenumber	Article name	Cam Width W1	Shutheight H1	Work Area Width W	Work Area Height H	Stroke Hw	Working Angle u (°)	Returnforce Fr (kN)	Weight (kg)	Working Force F (kN)	Driver	Positive Return
PSCXG80-40-ND	PSCXG80-40-ND	80	-	80	70	40	-	3	11,3	65	ND	-
PSCXG80-40-ND-PR	PSCXG80-40-ND-PR	80	-	80	70	40	-	3	11,3	65	ND	PR
PSCXG80-40-DH20	PSCXG80-40-DH20	80	168,3	80	70	40	-20	3	11,3	65	DH20	-
PSCXG80-40-DH20-PR	PSCXG80-40-DH20-PR	80	168,3	80	70	40	-20	3	11,3	65	DH20	PR
PSCXG80-40-DH15	PSCXG80-40-DH15	80	166,3	80	70	40	-15	3	11,3	65	DH15	-
PSCXG80-40-DH15-PR	PSCXG80-40-DH15-PR	80	166,3	80	70	40	-15	3	11,3	65	DH15	PR
PSCXG80-40-DH10	PSCXG80-40-DH10	80	161,8	80	70	40	-10	3	11,3	65	DH10	-
PSCXG80-40-DH10-PR	PSCXG80-40-DH10-PR	80	161,8	80	70	40	-10	3	11,3	65	DH10	PR
PSCXG80-40-DH05	PSCXG80-40-DH05	80	154,2	80	70	40	-5	3	11,3	65	DH05	-
PSCXG80-40-DH05-PR	PSCXG80-40-DH05-PR	80	154,2	80	70	40	-5	3	11,3	65	DH05	PR
PSCXG80-40-D00	PSCXG80-40-D00	80	144,8	80	70	40	0	3	11,3	65	D00	-
PSCXG80-40-D00-PR	PSCXG80-40-D00-PR	80	144,8	80	70	40	0	3	11,3	65	D00	PR
PSCXG80-40-DL05	PSCXG80-40-DL05	80	145,2	80	70	40	5	3	11,3	65	DL05	-
PSCXG80-40-DL05-PR	PSCXG80-40-DL05-PR	80	145,2	80	70	40	5	3	11,3	65	DL05	PR
PSCXG80-40-DL10	PSCXG80-40-DL10	80	133	80	70	40	10	3	11,3	65	DL10	-
PSCXG80-40-DL10-PR	PSCXG80-40-DL10-PR	80	133	80	70	40	10	3	11,3	65	DL10	PR
PSCXG80-40-DL15	PSCXG80-40-DL15	80	125,5	80	70	40	15	3	11,3	65	DL15	-
PSCXG80-40-DL15-PR	PSCXG80-40-DL15-PR	80	125,5	80	70	40	15	3	11,3	65	DL15	PR
PSCXG80-40-DL20	PSCXG80-40-DL20	80	114,6	80	70	40	20	3	11,3	65	DL20	-
PSCXG80-40-DL20-PR	PSCXG80-40-DL20-PR	80	114,6	80	70	40	20	3	11,3	65	DL20	PR
PSCXG80-40-DL25	PSCXG80-40-DL25	80	104,2	80	70	40	25	3	11,3	65	DL25	-
PSCXG80-40-DL25-PR	PSCXG80-40-DL25-PR	80	104,2	80	70	40	25	3	11,3	65	DL25	PR
PSCXG80-40-DL30	PSCXG80-40-DL30	80	95,8	80	70	40	30	3	11,3	65	DL30	-
PSCXG80-40-DL30-PR	PSCXG80-40-DL30-PR	80	95,8	80	70	40	30	3	11,3	65	DL30	PR
PSCXG80-40-DL35	PSCXG80-40-DL35	80	86,6	80	70	40	35	3	11,3	65	DL35	-
PSCXG80-40-DL35-PR	PSCXG80-40-DL35-PR	80	86,6	80	70	40	35	3	11,3	65	DL35	PR

Articlenumber	Article name	Cam Width W1	Shutheight H1	Work Area Width W	Work Area Height H	Stroke Hw	Working Angle u (°)	Returnforce Fr (kN)	Weight (kg)	Working Force F (kN)	Driver	Positive Return
PSCXG80-40-DL40	PSCXG80-40-DL40	80	76,2	80	70	40	40	3	11,3	65	DL40	-
PSCXG80-40-DL40-PR	PSCXG80-40-DL40-PR	80	76,2	80	70	40	40	3	11,3	65	DL40	PR
PSCXG80-40-DL45	PSCXG80-40-DL45	80	64,7	80	70	40	45	3	11,3	65	DL45	-
PSCXG80-40-DL45-PR	PSCXG80-40-DL45-PR	80	64,7	80	70	40	45	3	11,3	65	DL45	PR
PSCXG80-40-DL50	PSCXG80-40-DL50	80	59,9	80	70	40	50	3	11,3	65	DL50	-
PSCXG80-40-DL50-PR	PSCXG80-40-DL50-PR	80	59,9	80	70	40	50	3	11,3	65	DL50	PR