



VALCAM™ 58

Aerial CAM-Unit "ALL IN ONE", available in 4 working forces

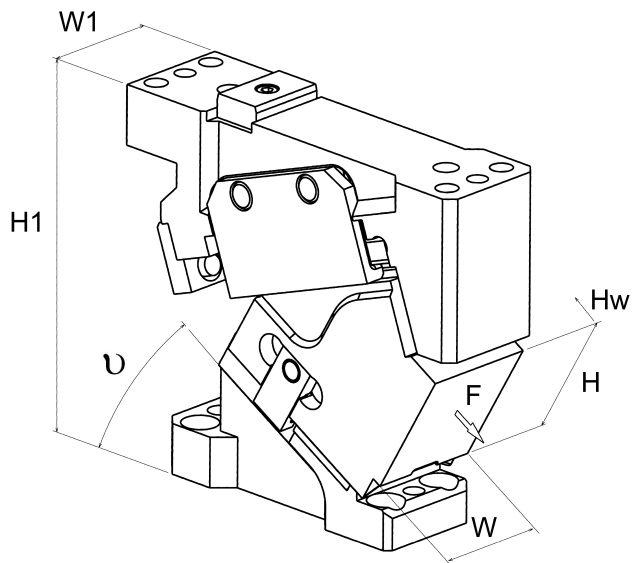

Product discription:

Aerial CAM-Unit "ALL IN ONE", available in 4 working forces

- SC: Extend the mounting surface forward from 1 to 60mm (at increments of 1mm)
- WC: The mounting surface width is extended to 64mm

Below in the list, there are only the SC with 60mm. Please use the comment function at the end of enquiry form if you need an intermediate size. The standard CAD data (CATIA and STEP) include also only the SC option with 60mm. Please adjust the dimension by yourself or use the "Kaufschieber-Adatppter" (only for CATIA).

Working force designed for 1 million strokes

For more information, see the working force distribution diagram in the [PDF](#)

Article properties:

CAM-Type

Aerial CAM

Variants:

Articlenumber	Article name	Cam Width W1	Shutheight H1	Work Area Width W	Work Area Height H	Stroke Hw	Working Angle u (°)	Returnforce Coil spring Fr (kN)	Returnforce Gas pressure spring Fr (kN)	Working Force F (kN)*	Weight (kg)
VACWS58-00	VACWS58-00	58	165	58	67	20,6	0	2,8	-	27,9	8,7
VACWS58-00-SC60	VACWS58-00-SC60	58	165	58	67	20,6	0	2,8	-	27,9	8,7
VACWS58-00-WC64	VACWS58-00-WC64	58	165	64	67	20,6	0	2,8	-	27,9	8,8
VACWS58-00-SC60-WC64	VACWS58-00-SC60-WC64	58	165	64	67	20,6	0	2,8	-	27,9	8,8
VACWL58-00	VACWL58-00	58	165	58	67	28,9	0	2,8	-	27,9	8,9
VACWL58-00-SC60	VACWL58-00-SC60	58	165	58	67	28,9	0	2,8	-	27,9	8,9
VACWL58-00-WC64	VACWL58-00-WC64	58	165	64	67	28,9	0	2,8	-	27,9	9
VACWL58-00-SC60-WC64	VACWL58-00-SC60-WC64	58	165	64	67	28,9	0	2,8	-	27,9	9
VACSS58-00	VACSS58-00	58	185	58	67	21,2	0	4,1	3,9	27,9	9,9
VACSS58-00-SC60	VACSS58-00-SC60	58	185	58	67	21,2	0	4,1	3,9	27,9	9,9

VALCAM™ 58

Aerial CAM-Unit "ALL IN ONE", available in 4 working forces



Articlenumber	Article name	Cam Width W1	Shutheight H1	Work Area Width W	Work Area Height H	Stroke Hw	Working Angle u (°)	Returnforce Coil spring Fr (kN)	Returnforce Gas pressure spring Fr (kN)	Working Force F (kN)*	Weight (kg)
VACSS58-00-WC64	VACSS58-00-WC64	58	185	64	67	21,2	0	4,1	3,9	27,9	10
VACSS58-00-SC60-WC64	VACSS58-00-SC60-WC64	58	185	64	67	21,2	0	4,1	3,9	27,9	10
VACSL58-00	VACSL58-00	58	185	58	67	28,9	0	2,8	3,9	27,9	10,1
VACSL58-00-SC60	VACSL58-00-SC60	58	185	58	67	28,9	0	2,8	3,9	27,9	10,1
VACSL58-00-WC64	VACSL58-00-WC64	58	185	64	67	28,9	0	2,8	3,9	27,9	10,2
VACSL58-00-SC60-WC64	VACSL58-00-SC60-WC64	58	185	64	67	28,9	0	2,8	3,9	27,9	10,2
VACYS58-00	VACYS58-00	58	185	58	67	21,2	0	4,1	6,6	42,6	9,9
VACYS58-00-SC60	VACYS58-00-SC60	58	185	58	67	21,2	0	4,1	6,6	42,6	9,9
VACYS58-00-WC64	VACYS58-00-WC64	58	185	64	67	21,2	0	4,1	6,6	42,6	10
VACYS58-00-SC60-WC64	VACYS58-00-SC60-WC64	58	185	64	67	21,2	0	4,1	6,6	42,6	10
VACYL58-00	VACYL58-00	58	185	58	67	28,9	0	2,8	6,7	42,6	10,1
VACYL58-00-SC60	VACYL58-00-SC60	58	185	58	67	28,9	0	2,8	6,7	42,6	10,1
VACYL58-00-WC64	VACYL58-00-WC64	58	185	64	67	28,9	0	2,8	6,7	42,6	10,2
VACYL58-00-SC60-WC64	VACYL58-00-SC60-WC64	58	185	64	67	28,9	0	2,8	6,7	42,6	10,2
VACPS58-00	VACPS58-00	58	185	58	67	21,2	0	4,1	6,6	58,8	9,9
VACPS58-00-SC60	VACPS58-00-SC60	58	185	58	67	21,2	0	4,1	6,6	58,8	9,9
VACPS58-00-WC64	VACPS58-00-WC64	58	185	64	67	21,2	0	4,1	6,6	58,8	10
VACPS58-00-SC60-WC64	VACPS58-00-SC60-WC64	58	185	64	67	21,2	0	4,1	6,6	58,8	10
VACPL58-00	VACPL58-00	58	185	58	67	28,9	0	2,8	6,7	58,8	10,1
VACPL58-00-SC60	VACPL58-00-SC60	58	185	58	67	28,9	0	2,8	6,7	58,8	10,1
VACPL58-00-WC64	VACPL58-00-WC64	58	185	64	67	28,9	0	2,8	6,7	58,8	10,2
VACPL58-00-SC60-WC64	VACPL58-00-SC60-WC64	58	185	64	67	28,9	0	2,8	6,7	58,8	10,2
VACBS58-00	VACBS58-00	58	185	58	67	21,2	0	-	6,6	78,9	9,9
VACBL58-00	VACBL58-00	58	185	58	67	28,9	0	-	6,7	78,9	10,1
VACWS58-05	VACWS58-05	58	165	58	67	20,6	5	2,8	-	27,9	8,6
VACWS58-05-SC60	VACWS58-05-SC60	58	165	58	67	20,6	5	2,8	-	27,9	8,6
VACWS58-05-WC64	VACWS58-05-WC64	58	165	64	67	20,6	5	2,8	-	27,9	8,7
VACWS58-05-SC60-WC64	VACWS58-05-SC60-WC64	58	165	64	67	20,6	5	2,8	-	27,9	8,7
VACWL58-05	VACWL58-05	58	165	58	67	30,5	5	2,8	-	27,9	8,7
VACWL58-05-SC60	VACWL58-05-SC60	58	165	58	67	30,5	5	2,8	-	27,9	8,7
VACWL58-05-WC64	VACWL58-05-WC64	58	165	64	67	30,5	5	2,8	-	27,9	8,8
VACWL58-05-SC60-WC64	VACWL58-05-SC60-WC64	58	165	64	67	30,5	5	2,8	-	27,9	8,8
VACSS58-05	VACSS58-05	58	185	58	67	23,4	5	4,1	3,9	27,9	9,9
VACSS58-05-SC60	VACSS58-05-SC60	58	185	58	67	23,4	5	4,1	3,9	27,9	9,9
VACSS58-05-WC64	VACSS58-05-WC64	58	185	64	67	23,4	5	4,1	3,9	27,9	10
VACSS58-05-SC60-WC64	VACSS58-05-SC60-WC64	58	185	64	67	23,4	5	4,1	3,9	27,9	10
VACSL58-05	VACSL58-05	58	185	58	67	31,9	5	2,8	3,9	27,9	10,1
VACSL58-05-SC60	VACSL58-05-SC60	58	185	58	67	31,9	5	2,8	3,9	27,9	10,1
VACSL58-05-WC64	VACSL58-05-WC64	58	185	64	67	31,9	5	2,8	3,9	27,9	10,2
VACSL58-05-SC60-WC64	VACSL58-05-SC60-WC64	58	185	64	67	31,9	5	2,8	3,9	27,9	10,2
VACYS58-05	VACYS58-05	58	185	58	67	23,4	5	4,1	6,6	42,6	9,9
VACYS58-05-SC60	VACYS58-05-SC60	58	185	58	67	23,4	5	4,1	6,6	42,6	9,9
VACYS58-05-WC64	VACYS58-05-WC64	58	185	64	67	23,4	5	4,1	6,6	42,6	10
VACYS58-05-SC60-WC64	VACYS58-05-SC60-WC64	58	185	64	67	23,4	5	4,1	6,6	42,6	10
VACYL58-05	VACYL58-05	58	185	58	67	31,9	5	2,8	6,7	42,6	10,1
VACYL58-05-SC60	VACYL58-05-SC60	58	185	58	67	31,9	5	2,8	6,7	42,6	10,1
VACYL58-05-WC64	VACYL58-05-WC64	58	185	64	67	31,9	5	2,8	6,7	42,6	10,2

VALCAM™ 58

Aerial CAM-Unit "ALL IN ONE", available in 4 working forces



Articlenumber	Article name	Cam Width W1	Shutheight H1	Work Area Width W	Work Area Height H	Stroke Hw	Working Angle u (°)	Returnforce Coil spring Fr (kN)	Returnforce Gas pressure spring Fr (kN)	Working Force F (kN)*	Weight (kg)
VACYL58-05-SC60-WC64	VACYL58-05-SC60-WC64	58	185	64	67	31,9	5	2,8	6,7	42,6	10,2
VACPS58-05	VACPS58-05	58	185	58	67	23,4	5	4,1	6,6	58,8	9,9
VACPS58-05-SC60	VACPS58-05-SC60	58	185	58	67	23,4	5	4,1	6,6	58,8	9,9
VACPS58-05-WC64	VACPS58-05-WC64	58	185	64	67	23,4	5	4,1	6,6	58,8	10
VACPS58-05-SC60-WC64	VACPS58-05-SC60-WC64	58	185	64	67	23,4	5	4,1	6,6	58,8	10
VACPL58-05	VACPL58-05	58	185	58	67	31,9	5	2,8	6,7	58,8	10,1
VACPL58-05-SC60	VACPL58-05-SC60	58	185	58	67	31,9	5	2,8	6,7	58,8	10,1
VACPL58-05-WC64	VACPL58-05-WC64	58	185	64	67	31,9	5	2,8	6,7	58,8	10,2
VACPL58-05-SC60-WC64	VACPL58-05-SC60-WC64	58	185	64	67	31,9	5	2,8	6,7	58,8	10,2
VACBS58-05	VACBS58-05	58	185	58	67	23,4	5	-	6,6	78,9	9,9
VACBL58-05	VACBL58-05	58	185	58	67	31,9	5	-	6,7	78,9	10,1
VACWS58-10	VACWS58-10	58	165	58	67	21	10	2,8	-	27,9	8,5
VACWS58-10-SC60	VACWS58-10-SC60	58	165	58	67	21	10	2,8	-	27,9	8,5
VACWS58-10-WC64	VACWS58-10-WC64	58	165	64	67	21	10	2,8	-	27,9	8,6
VACWS58-10-SC60-WC64	VACWS58-10-SC60-WC64	58	165	64	67	21	10	2,8	-	27,9	8,6
VACWL58-10	VACWL58-10	58	165	58	67	31,1	10	2,8	-	27,9	8,7
VACWL58-10-SC60	VACWL58-10-SC60	58	165	58	67	31,1	10	2,8	-	27,9	8,7
VACWL58-10-WC64	VACWL58-10-WC64	58	165	64	67	31,1	10	2,8	-	27,9	8,8
VACWL58-10-SC60-WC64	VACWL58-10-SC60-WC64	58	165	64	67	31,1	10	2,8	-	27,9	8,8
VACSS58-10	VACSS58-10	58	185	58	67	25,7	10	4,1	3,9	27,9	9,8
VACSS58-10-SC60	VACSS58-10-SC60	58	185	58	67	25,7	10	4,1	3,9	27,9	9,8
VACSS58-10-WC64	VACSS58-10-WC64	58	185	64	67	25,7	10	4,1	3,9	27,9	9,9
VACSS58-10-SC60-WC64	VACSS58-10-SC60-WC64	58	185	64	67	25,7	10	4,1	3,9	27,9	9,9
VACSL58-10	VACSL58-10	58	185	58	67	35	10	2,8	3,9	27,9	10,1
VACSL58-10-SC60	VACSL58-10-SC60	58	185	58	67	35	10	2,8	3,9	27,9	10,1
VACSL58-10-WC64	VACSL58-10-WC64	58	185	64	67	35	10	2,8	3,9	27,9	10,2
VACSL58-10-SC60-WC64	VACSL58-10-SC60-WC64	58	185	64	67	35	10	2,8	3,9	27,9	10,2
VACYS58-10	VACYS58-10	58	185	58	67	25,7	10	4,1	6,6	42,6	9,8
VACYS58-10-SC60	VACYS58-10-SC60	58	185	58	67	25,7	10	4,1	6,6	42,6	9,8
VACYS58-10-WC64	VACYS58-10-WC64	58	185	64	67	25,7	10	4,1	6,6	42,6	9,9
VACYS58-10-SC60-WC64	VACYS58-10-SC60-WC64	58	185	64	67	25,7	10	4,1	6,6	42,6	9,9
VACYL58-10	VACYL58-10	58	185	58	67	35	10	2,8	6,7	42,6	10,1
VACYL58-10-SC60	VACYL58-10-SC60	58	185	58	67	35	10	2,8	6,7	42,6	10,1
VACYL58-10-WC64	VACYL58-10-WC64	58	185	64	67	35	10	2,8	6,7	42,6	10,2
VACYL58-10-SC60-WC64	VACYL58-10-SC60-WC64	58	185	64	67	35	10	2,8	6,7	42,6	10,2
VACPS58-10	VACPS58-10	58	185	58	67	25,7	10	4,1	6,6	58,8	9,8
VACPS58-10-SC60	VACPS58-10-SC60	58	185	58	67	25,7	10	4,1	6,6	58,8	9,8
VACPS58-10-WC64	VACPS58-10-WC64	58	185	64	67	25,7	10	4,1	6,6	58,8	9,9
VACPS58-10-SC60-WC64	VACPS58-10-SC60-WC64	58	185	64	67	25,7	10	4,1	6,6	58,8	9,9
VACPL58-10	VACPL58-10	58	185	58	67	35	10	2,8	6,7	58,8	10,1
VACPL58-10-SC60	VACPL58-10-SC60	58	185	58	67	35	10	2,8	6,7	58,8	10,1
VACPL58-10-WC64	VACPL58-10-WC64	58	185	64	67	35	10	2,8	6,7	58,8	10,2
VACPL58-10-SC60-WC64	VACPL58-10-SC60-WC64	58	185	64	67	35	10	2,8	6,7	58,8	10,2
VACBS58-10	VACBS58-10	58	185	58	67	25,7	10	-	6,6	78,9	9,8
VACBL58-10	VACBL58-10	58	185	58	67	35	10	-	6,7	78,9	10,1
VACWS58-15	VACWS58-15	58	165	58	67	21,2	15	2,5	-	27,9	8,3
VACWS58-15-SC60	VACWS58-15-SC60	58	165	58	67	21,2	15	2,5	-	27,9	8,3

VALCAM™ 58

Aerial CAM-Unit "ALL IN ONE", available in 4 working forces



Articlenumber	Article name	Cam Width W1	Shutheight H1	Work Area Width W	Work Area Height H	Stroke Hw	Working Angle u (°)	Returnforce Coil spring Fr (kN)	Returnforce Gas pressure spring Fr (kN)	Working Force F (kN)*	Weight (kg)
VACWS58-15-WC64	VACWS58-15-WC64	58	165	64	67	21,2	15	2,5	-	27,9	8,4
VACWS58-15-SC60-WC64	VACWS58-15-SC60-WC64	58	165	64	67	21,2	15	2,5	-	27,9	8,4
VACWL58-15	VACWL58-15	58	165	58	67	32,2	15	2,6	-	27,9	8,5
VACWL58-15-SC60	VACWL58-15-SC60	58	165	58	67	32,2	15	2,6	-	27,9	8,5
VACWL58-15-WC64	VACWL58-15-WC64	58	165	64	67	32,2	15	2,6	-	27,9	8,6
VACWL58-15-SC60-WC64	VACWL58-15-SC60-WC64	58	165	64	67	32,2	15	2,6	-	27,9	8,6
VACSS58-15	VACSS58-15	58	185	58	67	28	15	4,1	3,9	27,9	9,7
VACSS58-15-SC60	VACSS58-15-SC60	58	185	58	67	28	15	4,1	3,9	27,9	9,7
VACSS58-15-WC64	VACSS58-15-WC64	58	185	64	67	28	15	4,1	3,9	27,9	9,8
VACSS58-15-SC60-WC64	VACSS58-15-SC60-WC64	58	185	64	67	28	15	4,1	3,9	27,9	9,8
VACSL58-15	VACSL58-15	58	185	58	67	38,2	15	2,8	3,9	27,9	10
VACSL58-15-SC60	VACSL58-15-SC60	58	185	58	67	38,2	15	2,8	3,9	27,9	10
VACSL58-15-WC64	VACSL58-15-WC64	58	185	64	67	38,2	15	2,8	3,9	27,9	10,1
VACSL58-15-SC60-WC64	VACSL58-15-SC60-WC64	58	185	64	67	38,2	15	2,8	3,9	27,9	10,1
VACYS58-15	VACYS58-15	58	185	58	67	28	15	4,1	6,6	42,6	9,7
VACYS58-15-SC60	VACYS58-15-SC60	58	185	58	67	28	15	4,1	6,6	42,6	9,7
VACYS58-15-WC64	VACYS58-15-WC64	58	185	64	67	28	15	4,1	6,6	42,6	9,8
VACYS58-15-SC60-WC64	VACYS58-15-SC60-WC64	58	185	64	67	28	15	4,1	6,6	42,6	9,8
VACYL58-15	VACYL58-15	58	185	58	67	38,2	15	2,8	6,7	42,6	10
VACYL58-15-SC60	VACYL58-15-SC60	58	185	58	67	38,2	15	2,8	6,7	42,6	10
VACYL58-15-WC64	VACYL58-15-WC64	58	185	64	67	38,2	15	2,8	6,7	42,6	10,1
VACYL58-15-SC60-WC64	VACYL58-15-SC60-WC64	58	185	64	67	38,2	15	2,8	6,7	42,6	10,1
VACPS58-15	VACPS58-15	58	185	58	67	28	15	4,1	6,6	58,8	9,7
VACPS58-15-SC60	VACPS58-15-SC60	58	185	58	67	28	15	4,1	6,6	58,8	9,7
VACPS58-15-WC64	VACPS58-15-WC64	58	185	64	67	28	15	4,1	6,6	58,8	9,8
VACPS58-15-SC60-WC64	VACPS58-15-SC60-WC64	58	185	64	67	28	15	4,1	6,6	58,8	9,8
VACPL58-15	VACPL58-15	58	185	58	67	38,2	15	2,8	6,7	58,8	10
VACPL58-15-SC60	VACPL58-15-SC60	58	185	58	67	38,2	15	2,8	6,7	58,8	10
VACPL58-15-WC64	VACPL58-15-WC64	58	185	64	67	38,2	15	2,8	6,7	58,8	10,1
VACPL58-15-SC60-WC64	VACPL58-15-SC60-WC64	58	185	64	67	38,2	15	2,8	6,7	58,8	10,1
VACBS58-15	VACBS58-15	58	185	58	67	28	15	-	6,6	78,9	9,7
VACBL58-15	VACBL58-15	58	185	58	67	38,2	15	-	6,7	78,9	10
VACWS58-20	VACWS58-20	58	165	58	67	22,1	20	2,4	-	27,9	8,2
VACWS58-20-SC60	VACWS58-20-SC60	58	165	58	67	22,1	20	2,4	-	27,9	8,2
VACWS58-20-WC64	VACWS58-20-WC64	58	165	64	67	22,1	20	2,4	-	27,9	8,3
VACWS58-20-SC60-WC64	VACWS58-20-SC60-WC64	58	165	64	67	22,1	20	2,4	-	27,9	8,3
VACWL58-20	VACWL58-20	58	165	58	67	34,1	20	2,6	-	27,9	8,3
VACWL58-20-SC60	VACWL58-20-SC60	58	165	58	67	34,1	20	2,6	-	27,9	8,3
VACWL58-20-WC64	VACWL58-20-WC64	58	165	64	67	34,1	20	2,6	-	27,9	8,4
VACWL58-20-SC60-WC64	VACWL58-20-SC60-WC64	58	165	64	67	34,1	20	2,6	-	27,9	8,4
VACSS58-20	VACSS58-20	58	185	58	67	30,4	20	4,1	3,9	27,9	9,7
VACSS58-20-SC60	VACSS58-20-SC60	58	185	58	67	30,4	20	4,1	3,9	27,9	9,7
VACSS58-20-WC64	VACSS58-20-WC64	58	185	64	67	30,4	20	4,1	3,9	27,9	9,8
VACSS58-20-SC60-WC64	VACSS58-20-SC60-WC64	58	185	64	67	30,4	20	4,1	3,9	27,9	9,8
VACSL58-20	VACSL58-20	58	185	58	67	41,5	20	2,8	3,9	27,9	9,9
VACSL58-20-SC60	VACSL58-20-SC60	58	185	58	67	41,5	20	2,8	3,9	27,9	9,9
VACSL58-20-WC64	VACSL58-20-WC64	58	185	64	67	41,5	20	2,8	3,9	27,9	10

VALCAM™ 58

Aerial CAM-Unit "ALL IN ONE", available in 4 working forces



Articlenumber	Article name	Cam Width W1	Shutheight H1	Work Area Width W	Work Area Height H	Stroke Hw	Working Angle u (°)	Returnforce Coil spring Fr (kN)	Returnforce Gas pressure spring Fr (kN)	Working Force F (kN)*	Weight (kg)
VACSL58-20-SC60-WC64	VACSL58-20-SC60-WC64	58	185	64	67	41,5	20	2,8	3,9	27,9	10
VACYS58-20	VACYS58-20	58	185	58	67	30,4	20	4,1	6,6	42,6	9,7
VACYS58-20-SC60	VACYS58-20-SC60	58	185	58	67	30,4	20	4,1	6,6	42,6	9,7
VACYS58-20-WC64	VACYS58-20-WC64	58	185	64	67	30,4	20	4,1	6,6	42,6	9,8
VACYS58-20-SC60-WC64	VACYS58-20-SC60-WC64	58	185	64	67	30,4	20	4,1	6,6	42,6	9,8
VACYL58-20	VACYL58-20	58	185	58	67	41,5	20	2,8	6,7	42,6	9,9
VACYL58-20-SC60	VACYL58-20-SC60	58	185	58	67	41,5	20	2,8	6,7	42,6	9,9
VACYL58-20-WC64	VACYL58-20-WC64	58	185	64	67	41,5	20	2,8	6,7	42,6	10
VACYL58-20-SC60-WC64	VACYL58-20-SC60-WC64	58	185	64	67	41,5	20	2,8	6,7	42,6	10
VACPS58-20	VACPS58-20	58	185	58	67	30,4	20	4,1	6,6	58,8	9,7
VACPS58-20-SC60	VACPS58-20-SC60	58	185	58	67	30,4	20	4,1	6,6	58,8	9,7
VACPS58-20-WC64	VACPS58-20-WC64	58	185	64	67	30,4	20	4,1	6,6	58,8	9,8
VACPS58-20-SC60-WC64	VACPS58-20-SC60-WC64	58	185	64	67	30,4	20	4,1	6,6	58,8	9,8
VACPL58-20	VACPL58-20	58	185	58	67	41,5	20	2,8	6,7	58,8	9,9
VACPL58-20-SC60	VACPL58-20-SC60	58	185	58	67	41,5	20	2,8	6,7	58,8	9,9
VACPL58-20-WC64	VACPL58-20-WC64	58	185	64	67	41,5	20	2,8	6,7	58,8	10
VACPL58-20-SC60-WC64	VACPL58-20-SC60-WC64	58	185	64	67	41,5	20	2,8	6,7	58,8	10
VACBS58-20	VACBS58-20	58	185	58	67	30,4	20	-	6,6	78,9	9,7
VACBL58-20	VACBL58-20	58	185	58	67	41,5	20	-	6,7	78,9	9,9
VACWS58-25	VACWS58-25	58	165	58	67	23	25	2,4	-	27,9	8,2
VACWS58-25-SC60	VACWS58-25-SC60	58	165	58	67	23	25	2,4	-	27,9	8,2
VACWS58-25-WC64	VACWS58-25-WC64	58	165	64	67	23	25	2,4	-	27,9	8,3
VACWS58-25-SC60-WC64	VACWS58-25-SC60-WC64	58	165	64	67	23	25	2,4	-	27,9	8,3
VACWL58-25	VACWL58-25	58	165	58	67	36	25	2,6	-	27,9	8,3
VACWL58-25-SC60	VACWL58-25-SC60	58	165	58	67	36	25	2,6	-	27,9	8,3
VACWL58-25-WC64	VACWL58-25-WC64	58	165	64	67	36	25	2,6	-	27,9	8,4
VACWL58-25-SC60-WC64	VACWL58-25-SC60-WC64	58	165	64	67	36	25	2,6	-	27,9	8,4
VACSS58-25	VACSS58-25	58	185	58	67	33	25	4,1	3,9	27,9	9,5
VACSS58-25-SC60	VACSS58-25-SC60	58	185	58	67	33	25	4,1	3,9	27,9	9,5
VACSS58-25-WC64	VACSS58-25-WC64	58	185	64	67	33	25	4,1	3,9	27,9	9,6
VACSS58-25-SC60-WC64	VACSS58-25-SC60-WC64	58	185	64	67	33	25	4,1	3,9	27,9	9,6
VACSL58-25	VACSL58-25	58	185	58	67	45	25	2,8	3,9	27,9	9,8
VACSL58-25-SC60	VACSL58-25-SC60	58	185	58	67	45	25	2,8	3,9	27,9	9,8
VACSL58-25-WC64	VACSL58-25-WC64	58	185	64	67	45	25	2,8	3,9	27,9	9,9
VACSL58-25-SC60-WC64	VACSL58-25-SC60-WC64	58	185	64	67	45	25	2,8	3,9	27,9	9,9
VACYS58-25	VACYS58-25	58	185	58	67	33	25	4,1	6,6	42,6	9,5
VACYS58-25-SC60	VACYS58-25-SC60	58	185	58	67	33	25	4,1	6,6	42,6	9,5
VACYS58-25-WC64	VACYS58-25-WC64	58	185	64	67	33	25	4,1	6,6	42,6	9,6
VACYS58-25-SC60-WC64	VACYS58-25-SC60-WC64	58	185	64	67	33	25	4,1	6,6	42,6	9,6
VACYL58-25	VACYL58-25	58	185	58	67	45	25	2,8	6,7	42,6	9,8
VACYL58-25-SC60	VACYL58-25-SC60	58	185	58	67	45	25	2,8	6,7	42,6	9,8
VACYL58-25-WC64	VACYL58-25-WC64	58	185	64	67	45	25	2,8	6,7	42,6	9,9
VACYL58-25-SC60-WC64	VACYL58-25-SC60-WC64	58	185	64	67	45	25	2,8	6,7	42,6	9,9
VACPS58-25	VACPS58-25	58	185	58	67	33	25	4,1	6,6	58,8	9,5
VACPS58-25-SC60	VACPS58-25-SC60	58	185	58	67	33	25	4,1	6,6	58,8	9,5
VACPS58-25-WC64	VACPS58-25-WC64	58	185	64	67	33	25	4,1	6,6	58,8	9,6
VACPS58-25-SC60-WC64	VACPS58-25-SC60-WC64	58	185	64	67	33	25	4,1	6,6	58,8	9,6

VALCAM™ 58

Aerial CAM-Unit "ALL IN ONE", available in 4 working forces



Articlenumber	Article name	Cam Width W1	Shutheight H1	Work Area Width W	Work Area Height H	Stroke Hw	Working Angle u (°)	Returnforce Coil spring Fr (kN)	Returnforce Gas pressure spring Fr (kN)	Working Force F (kN)*	Weight (kg)
VACPL58-25	VACPL58-25	58	185	58	67	45	25	2,8	6,7	58,8	9,8
VACPL58-25-SC60	VACPL58-25-SC60	58	185	58	67	45	25	2,8	6,7	58,8	9,8
VACPL58-25-WC64	VACPL58-25-WC64	58	185	64	67	45	25	2,8	6,7	58,8	9,9
VACPL58-25-SC60-WC64	VACPL58-25-SC60-WC64	58	185	64	67	45	25	2,8	6,7	58,8	9,9
VACBS58-25	VACBS58-25	58	185	58	67	33	25	-	6,6	78,9	9,5
VACBL58-25	VACBL58-25	58	185	58	67	45	25	-	6,7	78,9	9,8
VACWS58-30	VACWS58-30	58	165	58	67	25	30	2,4	-	27,9	8,1
VACWS58-30-SC60	VACWS58-30-SC60	58	165	58	67	25	30	2,4	-	27,9	8,1
VACWS58-30-WC64	VACWS58-30-WC64	58	165	64	67	25	30	2,4	-	27,9	8,2
VACWS58-30-SC60-WC64	VACWS58-30-SC60-WC64	58	165	64	67	25	30	2,4	-	27,9	8,2
VACWL58-30	VACWL58-30	58	165	58	67	38	30	2,6	-	27,9	8,2
VACWL58-30-SC60	VACWL58-30-SC60	58	165	58	67	38	30	2,6	-	27,9	8,2
VACWL58-30-WC64	VACWL58-30-WC64	58	165	64	67	38	30	2,6	-	27,9	8,3
VACWL58-30-SC60-WC64	VACWL58-30-SC60-WC64	58	165	64	67	38	30	2,6	-	27,9	8,3
VACSS58-30	VACSS58-30	58	185	58	67	35,8	30	4,1	3,9	27,9	9,4
VACSS58-30-SC60	VACSS58-30-SC60	58	185	58	67	35,8	30	4,1	3,9	27,9	9,4
VACSS58-30-WC64	VACSS58-30-WC64	58	185	64	67	35,8	30	4,1	3,9	27,9	9,5
VACSS58-30-SC60-WC64	VACSS58-30-SC60-WC64	58	185	64	67	35,8	30	4,1	3,9	27,9	9,5
VACSL58-30	VACSL58-30	58	185	58	67	48,8	30	2,8	3,9	27,9	9,7
VACSL58-30-SC60	VACSL58-30-SC60	58	185	58	67	48,8	30	2,8	3,9	27,9	9,7
VACSL58-30-WC64	VACSL58-30-WC64	58	185	64	67	48,8	30	2,8	3,9	27,9	9,8
VACSL58-30-SC60-WC64	VACSL58-30-SC60-WC64	58	185	64	67	48,8	30	2,8	3,9	27,9	9,8
VACYS58-30	VACYS58-30	58	185	58	67	35,8	30	4,1	6,6	42,6	9,4
VACYS58-30-SC60	VACYS58-30-SC60	58	185	58	67	35,8	30	4,1	6,6	42,6	9,4
VACYS58-30-WC64	VACYS58-30-WC64	58	185	64	67	35,8	30	4,1	6,6	42,6	9,5
VACYS58-30-SC60-WC64	VACYS58-30-SC60-WC64	58	185	64	67	35,8	30	4,1	6,6	42,6	9,5
VACYL58-30	VACYL58-30	58	185	58	67	48,8	30	2,8	6,7	42,6	9,7
VACYL58-30-SC60	VACYL58-30-SC60	58	185	58	67	48,8	30	2,8	6,7	42,6	9,7
VACYL58-30-WC64	VACYL58-30-WC64	58	185	64	67	48,8	30	2,8	6,7	42,6	9,8
VACYL58-30-SC60-WC64	VACYL58-30-SC60-WC64	58	185	64	67	48,8	30	2,8	6,7	42,6	9,8
VACPS58-30	VACPS58-30	58	185	58	67	35,8	30	4,1	6,6	58,8	9,4
VACPS58-30-SC60	VACPS58-30-SC60	58	185	58	67	35,8	30	4,1	6,6	58,8	9,4
VACPS58-30-WC64	VACPS58-30-WC64	58	185	64	67	35,8	30	4,1	6,6	58,8	9,5
VACPS58-30-SC60-WC64	VACPS58-30-SC60-WC64	58	185	64	67	35,8	30	4,1	6,6	58,8	9,5
VACPL58-30	VACPL58-30	58	185	58	67	48,8	30	2,8	6,7	58,8	9,7
VACPL58-30-SC60	VACPL58-30-SC60	58	185	58	67	48,8	30	2,8	6,7	58,8	9,7
VACPL58-30-WC64	VACPL58-30-WC64	58	185	64	67	48,8	30	2,8	6,7	58,8	9,8
VACPL58-30-SC60-WC64	VACPL58-30-SC60-WC64	58	185	64	67	48,8	30	2,8	6,7	58,8	9,8
VACBS58-30	VACBS58-30	58	185	58	67	35,8	30	-	6,6	78,9	9,4
VACBL58-30	VACBL58-30	58	185	58	67	48,8	30	-	6,7	78,9	9,7
VACWS58-35	VACWS58-35	58	165	58	67	27,1	35	2,4	-	27,9	8
VACWS58-35-SC60	VACWS58-35-SC60	58	165	58	67	27,1	35	2,4	-	27,9	8
VACWS58-35-WC64	VACWS58-35-WC64	58	165	64	67	27,1	35	2,4	-	27,9	8,1
VACWS58-35-SC60-WC64	VACWS58-35-SC60-WC64	58	165	64	67	27,1	35	2,4	-	27,9	8,1
VACWL58-35	VACWL58-35	58	165	58	67	40,1	35	2,6	-	27,9	8,2
VACWL58-35-SC60	VACWL58-35-SC60	58	165	58	67	40,1	35	2,6	-	27,9	8,2
VACWL58-35-WC64	VACWL58-35-WC64	58	165	64	67	40,1	35	2,6	-	27,9	8,3

VALCAM™ 58

Aerial CAM-Unit "ALL IN ONE", available in 4 working forces



Articlenumber	Article name	Cam Width W1	Shutheight H1	Work Area Width W	Work Area Height H	Stroke Hw	Working Angle u (°)	Returnforce Coil spring Fr (kN)	Returnforce Gas pressure spring Fr (kN)	Working Force F (kN)*	Weight (kg)
VACWL58-35-SC60-WC64	VACWL58-35-SC60-WC64	58	165	64	67	40,1	35	2,6	-	27,9	8,3
VACSS58-35	VACSS58-35	58	185	58	67	38,9	35	4,1	3,9	27,9	9,4
VACSS58-35-SC60	VACSS58-35-SC60	58	185	58	67	38,9	35	4,1	3,9	27,9	9,4
VACSS58-35-WC64	VACSS58-35-WC64	58	185	64	67	38,9	35	4,1	3,9	27,9	9,5
VACSS58-35-SC60-WC64	VACSS58-35-SC60-WC64	58	185	64	67	38,9	35	4,1	3,9	27,9	9,5
VACSL58-35	VACSL58-35	58	185	58	67	53,1	35	2,8	3,9	27,9	9,6
VACSL58-35-SC60	VACSL58-35-SC60	58	185	58	67	53,1	35	2,8	3,9	27,9	9,6
VACSL58-35-WC64	VACSL58-35-WC64	58	185	64	67	53,1	35	2,8	3,9	27,9	9,7
VACSL58-35-SC60-WC64	VACSL58-35-SC60-WC64	58	185	64	67	53,1	35	2,8	3,9	27,9	9,7
VACYS58-35	VACYS58-35	58	185	58	67	38,9	35	4,1	6,6	42,6	9,4
VACYS58-35-SC60	VACYS58-35-SC60	58	185	58	67	38,9	35	4,1	6,6	42,6	9,4
VACYS58-35-WC64	VACYS58-35-WC64	58	185	64	67	38,9	35	4,1	6,6	42,6	9,5
VACYS58-35-SC60-WC64	VACYS58-35-SC60-WC64	58	185	64	67	38,9	35	4,1	6,6	42,6	9,5
VACYL58-35	VACYL58-35	58	185	58	67	53,1	35	2,8	6,7	42,6	9,6
VACYL58-35-SC60	VACYL58-35-SC60	58	185	58	67	53,1	35	2,8	6,7	42,6	9,6
VACYL58-35-WC64	VACYL58-35-WC64	58	185	64	67	53,1	35	2,8	6,7	42,6	9,7
VACYL58-35-SC60-WC64	VACYL58-35-SC60-WC64	58	185	64	67	53,1	35	2,8	6,7	42,6	9,7
VACPS58-35	VACPS58-35	58	185	58	67	38,9	35	4,1	6,6	58,8	9,4
VACPS58-35-SC60	VACPS58-35-SC60	58	185	58	67	38,9	35	4,1	6,6	58,8	9,4
VACPS58-35-WC64	VACPS58-35-WC64	58	185	64	67	38,9	35	4,1	6,6	58,8	9,5
VACPS58-35-SC60-WC64	VACPS58-35-SC60-WC64	58	185	64	67	38,9	35	4,1	6,6	58,8	9,5
VACPL58-35	VACPL58-35	58	185	58	67	53,1	35	2,8	6,7	58,8	9,6
VACPL58-35-SC60	VACPL58-35-SC60	58	185	58	67	53,1	35	2,8	6,7	58,8	9,6
VACPL58-35-WC64	VACPL58-35-WC64	58	185	64	67	53,1	35	2,8	6,7	58,8	9,7
VACPL58-35-SC60-WC64	VACPL58-35-SC60-WC64	58	185	64	67	53,1	35	2,8	6,7	58,8	9,7
VACBS58-35	VACBS58-35	58	185	58	67	38,9	35	-	6,6	78,9	9,4
VACBL58-35	VACBL58-35	58	185	58	67	53,1	35	-	6,7	78,9	9,6
VACWS58-40	VACWS58-40	58	165	58	67	29,6	40	2,4	-	27,9	7,8
VACWS58-40-SC60	VACWS58-40-SC60	58	165	58	67	29,6	40	2,4	-	27,9	7,8
VACWS58-40-WC64	VACWS58-40-WC64	58	165	64	67	29,6	40	2,4	-	27,9	7,9
VACWS58-40-SC60-WC64	VACWS58-40-SC60-WC64	58	165	64	67	29,6	40	2,4	-	27,9	7,9
VACWL58-40	VACWL58-40	58	165	58	67	42,4	40	2,6	-	27,9	7,9
VACWL58-40-SC60	VACWL58-40-SC60	58	165	58	67	42,4	40	2,6	-	27,9	7,9
VACWL58-40-WC64	VACWL58-40-WC64	58	165	64	67	42,4	40	2,6	-	27,9	8
VACWL58-40-SC60-WC64	VACWL58-40-SC60-WC64	58	165	64	67	42,4	40	2,6	-	27,9	8
VACSS58-40	VACSS58-40	58	185	58	67	42,4	40	4,1	3,8	27,9	9,4
VACSS58-40-SC60	VACSS58-40-SC60	58	185	58	67	42,4	40	4,1	3,8	27,9	9,4
VACSS58-40-WC64	VACSS58-40-WC64	58	185	64	67	42,4	40	4,1	3,8	27,9	9,5
VACSS58-40-SC60-WC64	VACSS58-40-SC60-WC64	58	185	64	67	42,4	40	4,1	3,8	27,9	9,5
VACSL58-40	VACSL58-40	58	185	58	67	57,9	40	2,8	3,9	27,9	9,6
VACSL58-40-SC60	VACSL58-40-SC60	58	185	58	67	57,9	40	2,8	3,9	27,9	9,6
VACSL58-40-WC64	VACSL58-40-WC64	58	185	64	67	57,9	40	2,8	3,9	27,9	9,7
VACSL58-40-SC60-WC64	VACSL58-40-SC60-WC64	58	185	64	67	57,9	40	2,8	3,9	27,9	9,7
VACYS58-40	VACYS58-40	58	185	58	67	42,4	40	4,1	6,5	42,6	9,4
VACYS58-40-SC60	VACYS58-40-SC60	58	185	58	67	42,4	40	4,1	6,5	42,6	9,4
VACYS58-40-WC64	VACYS58-40-WC64	58	185	64	67	42,4	40	4,1	6,5	42,6	9,5
VACYS58-40-SC60-WC64	VACYS58-40-SC60-WC64	58	185	64	67	42,4	40	4,1	6,5	42,6	9,5

VALCAM™ 58

Aerial CAM-Unit "ALL IN ONE", available in 4 working forces



Articlenumber	Article name	Cam Width W1	Shutheight H1	Work Area Width W	Work Area Height H	Stroke Hw	Working Angle u (°)	Returnforce Coil spring Fr (kN)	Returnforce Gas pressure spring Fr (kN)	Working Force F (kN)*	Weight (kg)
VACYL58-40	VACYL58-40	58	185	58	67	57,9	40	2,8	6,7	42,6	9,6
VACYL58-40-SC60	VACYL58-40-SC60	58	185	58	67	57,9	40	2,8	6,7	42,6	9,6
VACYL58-40-WC64	VACYL58-40-WC64	58	185	64	67	57,9	40	2,8	6,7	42,6	9,7
VACYL58-40-SC60-WC64	VACYL58-40-SC60-WC64	58	185	64	67	57,9	40	2,8	6,7	42,6	9,7
VACPS58-40	VACPS58-40	58	185	58	67	42,4	40	4,1	6,5	58,8	9,4
VACPS58-40-SC60	VACPS58-40-SC60	58	185	58	67	42,4	40	4,1	6,5	58,8	9,4
VACPS58-40-WC64	VACPS58-40-WC64	58	185	64	67	42,4	40	4,1	6,5	58,8	9,5
VACPS58-40-SC60-WC64	VACPS58-40-SC60-WC64	58	185	64	67	42,4	40	4,1	6,5	58,8	9,5
VACPL58-40	VACPL58-40	58	185	58	67	57,9	40	2,8	6,7	58,8	9,6
VACPL58-40-SC60	VACPL58-40-SC60	58	185	58	67	57,9	40	2,8	6,7	58,8	9,6
VACPL58-40-WC64	VACPL58-40-WC64	58	185	64	67	57,9	40	2,8	6,7	58,8	9,7
VACPL58-40-SC60-WC64	VACPL58-40-SC60-WC64	58	185	64	67	57,9	40	2,8	6,7	58,8	9,7
VACBS58-40	VACBS58-40	58	185	58	67	42,4	40	-	6,5	78,9	9,4
VACBL58-40	VACBL58-40	58	185	58	67	57,9	40	-	6,7	78,9	9,6
VACWS58-45	VACWS58-45	58	165	58	67	32,4	45	2,4	-	27,9	7,9
VACWS58-45-SC60	VACWS58-45-SC60	58	165	58	67	32,4	45	2,4	-	27,9	7,9
VACWS58-45-WC64	VACWS58-45-WC64	58	165	64	67	32,4	45	2,4	-	27,9	8
VACWS58-45-SC60-WC64	VACWS58-45-SC60-WC64	58	165	64	67	32,4	45	2,4	-	27,9	8
VACWL58-45	VACWL58-45	58	165	58	67	46,5	45	2,6	-	27,9	8
VACWL58-45-SC60	VACWL58-45-SC60	58	165	58	67	46,5	45	2,6	-	27,9	8
VACWL58-45-WC64	VACWL58-45-WC64	58	165	64	67	46,5	45	2,6	-	27,9	8,1
VACWL58-45-SC60-WC64	VACWL58-45-SC60-WC64	58	165	64	67	46,5	45	2,6	-	27,9	8,1
VACSS58-45	VACSS58-45	58	185	58	67	46,5	45	4,1	3,8	27,9	9,3
VACSS58-45-SC60	VACSS58-45-SC60	58	185	58	67	46,5	45	4,1	3,8	27,9	9,3
VACSS58-45-WC64	VACSS58-45-WC64	58	185	64	67	46,5	45	4,1	3,8	27,9	9,4
VACSS58-45-SC60-WC64	VACSS58-45-SC60-WC64	58	185	64	67	46,5	45	4,1	3,8	27,9	9,4
VACSL58-45	VACSL58-45	58	185	58	67	62	45	2,7	3,9	27,9	9,5
VACSL58-45-SC60	VACSL58-45-SC60	58	185	58	67	62	45	2,7	3,9	27,9	9,5
VACSL58-45-WC64	VACSL58-45-WC64	58	185	64	67	62	45	2,7	3,9	27,9	9,6
VACSL58-45-SC60-WC64	VACSL58-45-SC60-WC64	58	185	64	67	62	45	2,7	3,9	27,9	9,6
VACYS58-45	VACYS58-45	58	185	58	67	46,5	45	4,1	6,5	42,6	9,3
VACYS58-45-SC60	VACYS58-45-SC60	58	185	58	67	46,5	45	4,1	6,5	42,6	9,3
VACYS58-45-WC64	VACYS58-45-WC64	58	185	64	67	46,5	45	4,1	6,5	42,6	9,4
VACYS58-45-SC60-WC64	VACYS58-45-SC60-WC64	58	185	64	67	46,5	45	4,1	6,5	42,6	9,4
VACYL58-45	VACYL58-45	58	185	58	67	62	45	2,7	6,6	42,6	9,5
VACYL58-45-SC60	VACYL58-45-SC60	58	185	58	67	62	45	2,7	6,6	42,6	9,5
VACYL58-45-WC64	VACYL58-45-WC64	58	185	64	67	62	45	2,7	6,6	42,6	9,6
VACYL58-45-SC60-WC64	VACYL58-45-SC60-WC64	58	185	64	67	62	45	2,7	6,6	42,6	9,6
VACPS58-45	VACPS58-45	58	185	58	67	46,5	45	4,1	6,5	58,8	9,3
VACPS58-45-SC60	VACPS58-45-SC60	58	185	58	67	46,5	45	4,1	6,5	58,8	9,3
VACPS58-45-WC64	VACPS58-45-WC64	58	185	64	67	46,5	45	4,1	6,5	58,8	9,4
VACPS58-45-SC60-WC64	VACPS58-45-SC60-WC64	58	185	64	67	46,5	45	4,1	6,5	58,8	9,4
VACPL58-45	VACPL58-45	58	185	58	67	62	45	2,7	6,6	58,8	9,5
VACPL58-45-SC60	VACPL58-45-SC60	58	185	58	67	62	45	2,7	6,6	58,8	9,5
VACPL58-45-WC64	VACPL58-45-WC64	58	185	64	67	62	45	2,7	6,6	58,8	9,6
VACPL58-45-SC60-WC64	VACPL58-45-SC60-WC64	58	185	64	67	62	45	2,7	6,6	58,8	9,6
VACBS58-45	VACBS58-45	58	185	58	67	46,5	45	-	6,5	78,9	9,3

VALCAM™ 58

Aerial CAM-Unit "ALL IN ONE", available in 4 working forces



Articlenumber	Article name	Cam Width W1	Shutheight H1	Work Area Width W	Work Area Height H	Stroke Hw	Working Angle u (°)	Returnforce Coil spring Fr (kN)	Returnforce Gas pressure spring Fr (kN)	Working Force F (kN)*	Weight (kg)
VACBL58-45	VACBL58-45	58	185	58	67	62	45	-	6,6	78,9	9,5
VACWS58-50	VACWS58-50	58	165	58	67	35,8	50	2,4	-	27,9	7,9
VACWS58-50-SC60	VACWS58-50-SC60	58	165	58	67	35,8	50	2,4	-	27,9	7,9
VACWS58-50-WC64	VACWS58-50-WC64	58	165	64	67	35,8	50	2,4	-	27,9	8
VACWS58-50-SC60-WC64	VACWS58-50-SC60-WC64	58	165	64	67	35,8	50	2,4	-	27,9	8
VACWL58-50	VACWL58-50	58	165	58	67	49,8	50	2,6	-	27,9	8
VACWL58-50-SC60	VACWL58-50-SC60	58	165	58	67	49,8	50	2,6	-	27,9	8
VACWL58-50-WC64	VACWL58-50-WC64	58	165	64	67	49,8	50	2,6	-	27,9	8,1
VACWL58-50-SC60-WC64	VACWL58-50-SC60-WC64	58	165	64	67	49,8	50	2,6	-	27,9	8,1
VACSS58-50	VACSS58-50	58	190	58	67	51,3	50	4,1	3,8	27,9	9,5
VACSS58-50-SC60	VACSS58-50-SC60	58	190	58	67	51,3	50	4,1	3,8	27,9	9,5
VACSS58-50-WC64	VACSS58-50-WC64	58	190	64	67	51,3	50	4,1	3,8	27,9	9,6
VACSS58-50-SC60-WC64	VACSS58-50-SC60-WC64	58	190	64	67	51,3	50	4,1	3,8	27,9	9,6
VACSL58-50	VACSL58-50	58	190	58	67	62,2	50	2,5	3,8	27,9	9,8
VACSL58-50-SC60	VACSL58-50-SC60	58	190	58	67	62,2	50	2,5	3,8	27,9	9,8
VACSL58-50-WC64	VACSL58-50-WC64	58	190	64	67	62,2	50	2,5	3,8	27,9	9,9
VACSL58-50-SC60-WC64	VACSL58-50-SC60-WC64	58	190	64	67	62,2	50	2,5	3,8	27,9	9,9
VACYS58-50	VACYS58-50	58	190	58	67	51,3	50	4,1	6,5	42,6	9,5
VACYS58-50-SC60	VACYS58-50-SC60	58	190	58	67	51,3	50	4,1	6,5	42,6	9,5
VACYS58-50-WC64	VACYS58-50-WC64	58	190	64	67	51,3	50	4,1	6,5	42,6	9,6
VACYS58-50-SC60-WC64	VACYS58-50-SC60-WC64	58	190	64	67	51,3	50	4,1	6,5	42,6	9,6
VACYL58-50	VACYL58-50	58	190	58	67	62,2	50	2,5	6,4	42,6	9,8
VACYL58-50-SC60	VACYL58-50-SC60	58	190	58	67	62,2	50	2,5	6,4	42,6	9,8
VACYL58-50-WC64	VACYL58-50-WC64	58	190	64	67	62,2	50	2,5	6,4	42,6	9,9
VACYL58-50-SC60-WC64	VACYL58-50-SC60-WC64	58	190	64	67	62,2	50	2,5	6,4	42,6	9,9
VACPS58-50	VACPS58-50	58	190	58	67	51,3	50	4,1	6,5	58,8	9,5
VACPS58-50-SC60	VACPS58-50-SC60	58	190	58	67	51,3	50	4,1	6,5	58,8	9,5
VACPS58-50-WC64	VACPS58-50-WC64	58	190	64	67	51,3	50	4,1	6,5	58,8	9,6
VACPS58-50-SC60-WC64	VACPS58-50-SC60-WC64	58	190	64	67	51,3	50	4,1	6,5	58,8	9,6
VACPL58-50	VACPL58-50	58	190	58	67	62,2	50	2,5	6,4	58,8	9,8
VACPL58-50-SC60	VACPL58-50-SC60	58	190	58	67	62,2	50	2,5	6,4	58,8	9,8
VACPL58-50-WC64	VACPL58-50-WC64	58	190	64	67	62,2	50	2,5	6,4	58,8	9,9
VACPL58-50-SC60-WC64	VACPL58-50-SC60-WC64	58	190	64	67	62,2	50	2,5	6,4	58,8	9,9
VACBS58-50	VACBS58-50	58	190	58	67	51,3	50	-	6,5	78,9	9,5
VACBL58-50	VACBL58-50	58	190	58	67	62,2	50	-	6,4	78,9	9,8
VACWS58-55	VACWS58-55	58	180	58	82	45,3	55	2,7	-	27,9	8,3
VACWS58-55-SC60	VACWS58-55-SC60	58	180	58	82	45,3	55	2,7	-	27,9	8,3
VACWS58-55-WC64	VACWS58-55-WC64	58	180	64	82	45,3	55	2,7	-	27,9	8,4
VACWS58-55-SC60-WC64	VACWS58-55-SC60-WC64	58	180	64	82	45,3	55	2,7	-	27,9	8,4
VACSS58-55	VACSS58-55	58	205	58	82	47,1	55	4,5	3,9	27,9	10,3
VACSS58-55-SC60	VACSS58-55-SC60	58	205	58	82	47,1	55	4,5	3,9	27,9	10,3
VACSS58-55-WC64	VACSS58-55-WC64	58	205	64	82	47,1	55	4,5	3,9	27,9	10,4
VACSS58-55-SC60-WC64	VACSS58-55-SC60-WC64	58	205	64	82	47,1	55	4,5	3,9	27,9	10,4
VACYS58-55	VACYS58-55	58	205	58	82	47,1	55	4,5	6,6	42,6	10,3
VACYS58-55-SC60	VACYS58-55-SC60	58	205	58	82	47,1	55	4,5	6,6	42,6	10,3
VACYS58-55-WC64	VACYS58-55-WC64	58	205	64	82	47,1	55	4,5	6,6	42,6	10,4
VACYS58-55-SC60-WC64	VACYS58-55-SC60-WC64	58	205	64	82	47,1	55	4,5	6,6	42,6	10,4

VALCAM™ 58

Aerial CAM-Unit "ALL IN ONE", available in 4 working forces



Articlenumber	Article name	Cam Width W1	Shutheight H1	Work Area Width W	Work Area Height H	Stroke Hw	Working Angle u (°)	Returnforce Coil spring Fr (kN)	Returnforce Gas pressure spring Fr (kN)	Working Force F (kN)*	Weight (kg)
VACPS58-55	VACPS58-55	58	205	58	82	47,1	55	4,5	6,6	58,8	10,3
VACPS58-55-SC60	VACPS58-55-SC60	58	205	58	82	47,1	55	4,5	6,6	58,8	10,3
VACPS58-55-WC64	VACPS58-55-WC64	58	205	64	82	47,1	55	4,5	6,6	58,8	10,4
VACPS58-55-SC60-WC64	VACPS58-55-SC60-WC64	58	205	64	82	47,1	55	4,5	6,6	58,8	10,4
VACBS58-55	VACBS58-55	58	205	58	82	47,1	55	-	6,6	78,9	10,3
VACWS58-60	VACWS58-60	58	185	58	85	46	60	2,9	-	27,9	8,8
VACWS58-60-SC60	VACWS58-60-SC60	58	185	58	85	46	60	2,9	-	27,9	8,8
VACWS58-60-WC64	VACWS58-60-WC64	58	185	64	85	46	60	2,9	-	27,9	8,9
VACWS58-60-SC60-WC64	VACWS58-60-SC60-WC64	58	185	64	85	46	60	2,9	-	27,9	8,9
VACSS58-60	VACSS58-60	58	210	58	85	48	60	4,9	4,7	27,9	10,7
VACSS58-60-SC60	VACSS58-60-SC60	58	210	58	85	48	60	4,9	4,7	27,9	10,7
VACSS58-60-WC64	VACSS58-60-WC64	58	210	64	85	48	60	4,9	4,7	27,9	10,8
VACSS58-60-SC60-WC64	VACSS58-60-SC60-WC64	58	210	64	85	48	60	4,9	4,7	27,9	10,8
VACYS58-60	VACYS58-60	58	210	58	85	48	60	4,9	8	42,6	10,7
VACYS58-60-SC60	VACYS58-60-SC60	58	210	58	85	48	60	4,9	8	42,6	10,7
VACYS58-60-WC64	VACYS58-60-WC64	58	210	64	85	48	60	4,9	8	42,6	10,8
VACYS58-60-SC60-WC64	VACYS58-60-SC60-WC64	58	210	64	85	48	60	4,9	8	42,6	10,8
VACPS58-60	VACPS58-60	58	210	58	85	48	60	4,9	8	58,8	10,7
VACPS58-60-SC60	VACPS58-60-SC60	58	210	58	85	48	60	4,9	8	58,8	10,7
VACPS58-60-WC64	VACPS58-60-WC64	58	210	64	85	48	60	4,9	8	58,8	10,8
VACPS58-60-SC60-WC64	VACPS58-60-SC60-WC64	58	210	64	85	48	60	4,9	8	58,8	10,8
VACBS58-60	VACBS58-60	58	210	58	85	48	60	-	8	78,9	10,7
VACWS58-65	VACWS58-65	58	190	58	83	47,3	65	3,3	-	27,9	9,1
VACWS58-65-SC60	VACWS58-65-SC60	58	190	58	83	47,3	65	3,3	-	27,9	9,1
VACWS58-65-WC64	VACWS58-65-WC64	58	190	64	83	47,3	65	3,3	-	27,9	9,2
VACWS58-65-SC60-WC64	VACWS58-65-SC60-WC64	58	190	64	83	47,3	65	3,3	-	27,9	9,2
VACSS58-65	VACSS58-65	58	215	58	83	49,7	65	5,6	5,2	27,9	11,1
VACSS58-65-SC60	VACSS58-65-SC60	58	215	58	83	49,7	65	5,6	5,2	27,9	11,1
VACSS58-65-WC64	VACSS58-65-WC64	58	215	64	83	49,7	65	5,6	5,2	27,9	11,2
VACSS58-65-SC60-WC64	VACSS58-65-SC60-WC64	58	215	64	83	49,7	65	5,6	5,2	27,9	11,2
VACYS58-65	VACYS58-65	58	215	58	83	49,7	65	5,6	8,7	42,6	11,1
VACYS58-65-SC60	VACYS58-65-SC60	58	215	58	83	49,7	65	5,6	8,7	42,6	11,1
VACYS58-65-WC64	VACYS58-65-WC64	58	215	64	83	49,7	65	5,6	8,7	42,6	11,2
VACYS58-65-SC60-WC64	VACYS58-65-SC60-WC64	58	215	64	83	49,7	65	5,6	8,7	42,6	11,2
VACPS58-65	VACPS58-65	58	215	58	83	49,7	65	5,6	8,7	58,8	11,1
VACPS58-65-SC60	VACPS58-65-SC60	58	215	58	83	49,7	65	5,6	8,7	58,8	11,1
VACPS58-65-WC64	VACPS58-65-WC64	58	215	64	83	49,7	65	5,6	8,7	58,8	11,2
VACPS58-65-SC60-WC64	VACPS58-65-SC60-WC64	58	215	64	83	49,7	65	5,6	8,7	58,8	11,2
VACBS58-65	VACBS58-65	58	215	58	83	49,7	65	-	8,7	78,9	11,1
VACWS58-70	VACWS58-70	58	190	58	78	49,7	70	3,8	-	27,9	9,4
VACWS58-70-SC60	VACWS58-70-SC60	58	190	58	78	49,7	70	3,8	-	27,9	9,4
VACWS58-70-WC64	VACWS58-70-WC64	58	190	64	78	49,7	70	3,8	-	27,9	9,5
VACWS58-70-SC60-WC64	VACWS58-70-SC60-WC64	58	190	64	78	49,7	70	3,8	-	27,9	9,5
VACSS58-70	VACSS58-70	58	215	58	78	52,6	70	6,5	5,6	27,9	11,3
VACSS58-70-SC60	VACSS58-70-SC60	58	215	58	78	52,6	70	6,5	5,6	27,9	11,3
VACSS58-70-WC64	VACSS58-70-WC64	58	215	64	78	52,6	70	6,5	5,6	27,9	11,4
VACSS58-70-SC60-WC64	VACSS58-70-SC60-WC64	58	215	64	78	52,6	70	6,5	5,6	27,9	11,4

VALCAM™ 58

Aerial CAM-Unit "ALL IN ONE", available in 4 working forces



Articlenumber	Article name	Cam Width W1	Shutheight H1	Work Area Width W	Work Area Height H	Stroke Hw	Working Angle u (°)	Returnforce Coil spring Fr (kN)	Returnforce Gas pressure spring Fr (kN)	Working Force F (kN)*	Weight (kg)
VACYS58-70	VACYS58-70	58	215	58	78	52,6	70	6,5	10,1	42,6	11,3
VACYS58-70-SC60	VACYS58-70-SC60	58	215	58	78	52,6	70	6,5	10,1	42,6	11,3
VACYS58-70-WC64	VACYS58-70-WC64	58	215	64	78	52,6	70	6,5	10,1	42,6	11,4
VACYS58-70-SC60-WC64	VACYS58-70-SC60-WC64	58	215	64	78	52,6	70	6,5	10,1	42,6	11,4
VACPS58-70	VACPS58-70	58	215	58	78	52,6	70	6,5	10,1	58,8	11,3
VACPS58-70-SC60	VACPS58-70-SC60	58	215	58	78	52,6	70	6,5	10,1	58,8	11,3
VACPS58-70-WC64	VACPS58-70-WC64	58	215	64	78	52,6	70	6,5	10,1	58,8	11,4
VACPS58-70-SC60-WC64	VACPS58-70-SC60-WC64	58	215	64	78	52,6	70	6,5	10,1	58,8	11,4
VACBS58-70	VACBS58-70	58	215	58	78	52,6	70	-	10,1	78,9	11,3
VACWS58-75	VACWS58-75	58	190	58	80	50,2	75	4,5	-	27,9	9,7
VACWS58-75-SC60	VACWS58-75-SC60	58	190	58	80	50,2	75	4,5	-	27,9	9,7
VACWS58-75-WC64	VACWS58-75-WC64	58	190	64	80	50,2	75	4,5	-	27,9	9,8
VACWS58-75-SC60-WC64	VACWS58-75-SC60-WC64	58	190	64	80	50,2	75	4,5	-	27,9	9,8
VACSS58-75	VACSS58-75	58	215	58	80	54,1	75	7,4	7,2	27,9	11,7
VACSS58-75-SC60	VACSS58-75-SC60	58	215	58	80	54,1	75	7,4	7,2	27,9	11,7
VACSS58-75-WC64	VACSS58-75-WC64	58	215	64	80	54,1	75	7,4	7,2	27,9	11,8
VACSS58-75-SC60-WC64	VACSS58-75-SC60-WC64	58	215	64	80	54,1	75	7,4	7,2	27,9	11,8
VACYS58-75	VACYS58-75	58	215	58	80	54,1	75	7,4	12	42,6	11,7
VACYS58-75-SC60	VACYS58-75-SC60	58	215	58	80	54,1	75	7,4	12	42,6	11,7
VACYS58-75-WC64	VACYS58-75-WC64	58	215	64	80	54,1	75	7,4	12	42,6	11,8
VACYS58-75-SC60-WC64	VACYS58-75-SC60-WC64	58	215	64	80	54,1	75	7,4	12	42,6	11,8
VACPS58-75	VACPS58-75	58	215	58	80	54,1	75	7,4	12	58,8	11,7
VACPS58-75-SC60	VACPS58-75-SC60	58	215	58	80	54,1	75	7,4	12	58,8	11,7
VACPS58-75-WC64	VACPS58-75-WC64	58	215	64	80	54,1	75	7,4	12	58,8	11,8
VACPS58-75-SC60-WC64	VACPS58-75-SC60-WC64	58	215	64	80	54,1	75	7,4	12	58,8	11,8
VACBS58-75	VACBS58-75	58	215	58	80	54,1	75	-	12	78,9	11,7
VACWS58-80	VACWS58-80	58	190	58	80	57,6	80	5,6	-	27,9	10
VACWS58-80-SC60	VACWS58-80-SC60	58	190	58	80	57,6	80	5,6	-	27,9	10
VACWS58-80-WC64	VACWS58-80-WC64	58	190	64	80	57,6	80	5,6	-	27,9	10,1
VACWS58-80-SC60-WC64	VACWS58-80-SC60-WC64	58	190	64	80	57,6	80	5,6	-	27,9	10,1
VACSS58-80	VACSS58-80	58	215	58	80	63,3	80	9,3	8,8	27,9	12,2
VACSS58-80-SC60	VACSS58-80-SC60	58	215	58	80	63,3	80	9,3	8,8	27,9	12,2
VACSS58-80-WC64	VACSS58-80-WC64	58	215	64	80	63,3	80	9,3	8,8	27,9	12,3
VACSS58-80-SC60-WC64	VACSS58-80-SC60-WC64	58	215	64	80	63,3	80	9,3	8,8	27,9	12,3
VACYS58-80	VACYS58-80	58	215	58	80	63,3	80	9,3	13,9	42,6	12,2
VACYS58-80-SC60	VACYS58-80-SC60	58	215	58	80	63,3	80	9,3	13,9	42,6	12,2
VACYS58-80-WC64	VACYS58-80-WC64	58	215	64	80	63,3	80	9,3	13,9	42,6	12,3
VACYS58-80-SC60-WC64	VACYS58-80-SC60-WC64	58	215	64	80	63,3	80	9,3	13,9	42,6	12,3
VACPS58-80	VACPS58-80	58	215	58	80	63,3	80	9,3	13,9	58,8	12,2
VACPS58-80-SC60	VACPS58-80-SC60	58	215	58	80	63,3	80	9,3	13,9	58,8	12,2
VACPS58-80-WC64	VACPS58-80-WC64	58	215	64	80	63,3	80	9,3	13,9	58,8	12,3
VACPS58-80-SC60-WC64	VACPS58-80-SC60-WC64	58	215	64	80	63,3	80	9,3	13,9	58,8	12,3
VACBS58-80	VACBS58-80	58	215	58	80	63,3	80	-	13,9	78,9	12,2