


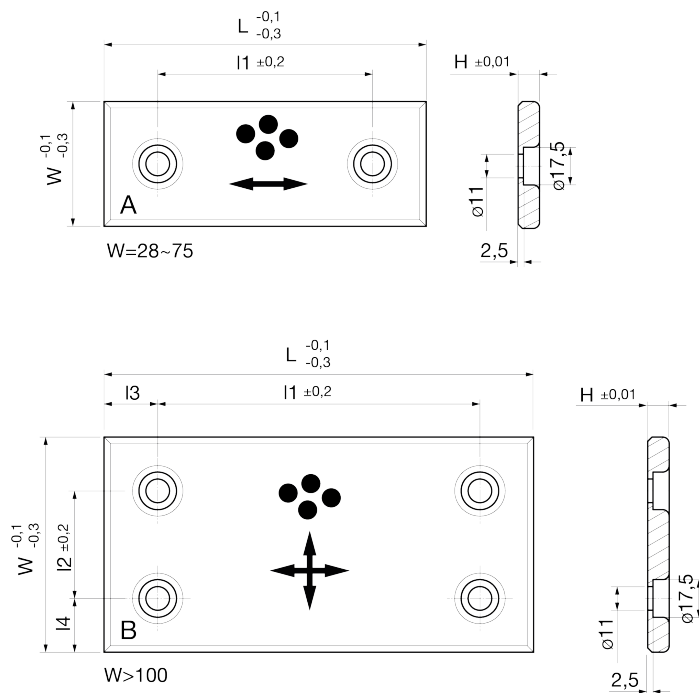

#### Product discription:

Guide plate, self lubricating

#### Article properties:

|                       |                                        |
|-----------------------|----------------------------------------|
| Base Material         | Stahl mit Festschmierstoff (SO#50SKS3) |
| Sliding speed v       | 10 m/min                               |
| Self-lubricating      | Yes                                    |
| Lubricant             | Graphite                               |
| Surface Pressure P    | 50 N/mm <sup>2</sup>                   |
| P*v-value             | 80 N/mm <sup>2</sup> x m/min           |
| Operating temperature | -50°C / +200°C                         |
| Friction coefficient  | 0,11                                   |

#### Variants:

| Articlenumber | Article name | Width W | Length L | Height H | I1  | I2 | I3 | I4 |
|---------------|--------------|---------|----------|----------|-----|----|----|----|
| 27700028075   | TSP 28-75    | 28      | 75       | 10       | 45  | -  | 15 | -  |
| 27700028100   | TSP 28-100   | 28      | 100      | 10       | 50  | -  | 25 | -  |
| 27700028125   | TSP 28-125   | 28      | 125      | 10       | 75  | -  | 25 | -  |
| 27700028150   | TSP 28-150   | 28      | 150      | 10       | 100 | -  | 25 | -  |
| 27700038075   | TSP 38-75    | 38      | 75       | 10       | 45  | -  | 15 | -  |
| 27700038100   | TSP 38-100   | 38      | 100      | 10       | 50  | -  | 25 | -  |
| 27700038125   | TSP 38-125   | 38      | 125      | 10       | 75  | -  | 25 | -  |
| 27700038150   | TSP 38-150   | 38      | 150      | 10       | 100 | -  | 25 | -  |
| 27700048075   | TSP 48-75    | 48      | 75       | 10       | 45  | -  | 15 | -  |
| 27700048100   | TSP 48-100   | 48      | 100      | 10       | 50  | -  | 25 | -  |
| 27700048125   | TSP 48-125   | 48      | 125      | 10       | 75  | -  | 25 | -  |
| 27700048150   | TSP 48-150   | 48      | 150      | 10       | 100 | -  | 25 | -  |
| 27700075075   | TSP 75-75    | 75      | 75       | 10       | 25  | -  | 25 | -  |
| 27700075100   | TSP 75-100   | 75      | 100      | 10       | 50  | -  | 25 | -  |
| 27700075125   | TSP 75-125   | 75      | 125      | 10       | 75  | -  | 25 | -  |

## TSP

Guide plate, self lubricating



| Articlenumber | Article name | Width<br>W | Length<br>L | Height<br>H | I1  | I2 | I3 | I4   |
|---------------|--------------|------------|-------------|-------------|-----|----|----|------|
| 27700075150   | TSP 75-150   | 75         | 150         | 10          | 100 | -  | 25 | -    |
| 27700100100   | TSP 100-100  | 100        | 100         | 10          | 50  | 50 | 25 | 25   |
| 27700100125   | TSP 100-125  | 100        | 125         | 10          | 75  | 50 | 25 | 25   |
| 27700100150   | TSP 100-150  | 100        | 150         | 10          | 100 | 50 | 25 | 25   |
| 27700100200   | TSP 100-200  | 100        | 200         | 10          | 150 | 50 | 25 | 25   |
| 27700125125   | TSP 125-125  | 125        | 125         | 10          | 75  | 50 | 25 | 37,5 |
| 27700125150   | TSP 125-150  | 125        | 150         | 10          | 100 | 50 | 25 | 37,5 |