VTK-BS

Stroke plate according to VDI 3357, bronze with solid lubricant

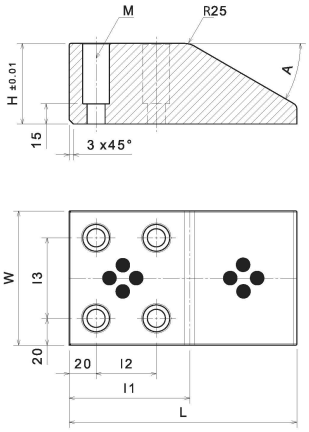

Product discription:

Stroke plate according to VDI 3357, bronze with solid lubricant

Article properties:

Sliding speed v	30 m/min
Base Material	Special Brass (SO#50SP2)
Self-lubricating	Yes
Lubricant	Graphite
Surface Pressure P	100 N/mm²
P*v-value	200 N/mm² x m/min
Operating temperature	-50°C / +200°C (max. 300°C)
Friction coefficient	0,07

Variants:

Articlenumber	Article name	Width W	Length L	Height H	Angle a	l1	l2	l3	M (ISO 4762)
212148170	VTK-BS 100-170-45	100	170	45	20°	90	45	60	4xM12
212148171	VTK-BS 125-170-45	125	170	45	20°	90	45	85	4xM12
212148172	VTK-BS 150-170-45	150	170	45	20°	90	45	110	4xM12
212148181	VTK-BS 100-150-45	100	150	45	30°	90	45	60	4xM12
212148182	VTK-BS 100-170-60	100	170	60	30°	90	45	60	4xM12
212148183	VTK-BS 125-150-45	125	150	45	30°	90	45	85	4xM12
212148184	VTK-BS 125-170-60	125	170	60	30°	90	45	85	4xM12
212148185	VTK-BS 150-150-45	150	150	45	30°	90	45	110	4xM12
212148186	VTK-BS 150-170-60	150	170	60	30°	90	45	110	4xM12